

GALAS SERIES

WELIGHTING
SHINE IN A BRIGHTER WAY

GALAS FAMILY

TYPES OF GALAS SERIES LIGHTING



GALAS MINI

5.4W



GALAS / GALAS+

10.8W / 12.6W



GALAS MR16

15W LED



GALAS MAX

18W

ROUND TRIM



Ø62



Ø83



Ø83



Ø105

ROUND TRIMLESS



Ø53



Ø71



Ø71



Ø92

SQUARE TRIM



62 x 62



83 x 83 / 82 x 82



83 x 83



103 x 103

SQUARE TRIMLESS



53 x 53



72 x 72



72 x 72



90 x 90

TRIM COLOR



Black



White

REFLECTOR COLOR



Matte Black



Matte Silver



Dark Chrome



Silver Chrome




Matte White

ACCESSORY OPTIONS



Frosted Glass Diffuser



Honeycomb Louver

The GALAS Series is revolutionary take on traditional downlights.

Designed with innovation in mind, the GALAS series features Leakless Tilting Technology, allowing for a graceful 30-degree tilt from the center without any light leakage.

This means you can enjoy optimal performance and exceptional light quality without compromise. GALAS featuring in three sizes and various shapes, ensuring optimal performance and versatility for any space.



No light leakage after tilting



GALAS MINI SERIES

GALAS MINI
GALAS MINI TL
GALAS S MINI
GALAS S MINI TL

62

GALAS MINI

- Round trim, recessed downlight adjustable version
- Die-cast aluminium trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Standard Version

WE Q31346 - Angle - **90** CRI CCT - Color

| Beam Angle | | CCT | Trim Color | Reflector Color |
|------------|---|-------|------------|-----------------|
| 1 | 5 | 15° | W White | B Matte Black |
| 2 | 4 | 24° | B Black | D Dark Chrome |
| 3 | 6 | 36° | | M Matte Silver |
| 4 | 0 | 3000K | | S Silver Chrome |
| 5 | 5 | 4000K | | W Matte White |

COB Max. 5.4W 150mA 550lm 3000K

IP54 Version

WE Q31346C - Angle - **90** CRI CCT - Color

| Beam Angle | | CCT | Trim Color | Reflector Color |
|------------|---|-------|------------|-----------------|
| 1 | 5 | 15° | W White | B Matte Black |
| 2 | 4 | 24° | B Black | D Dark Chrome |
| 3 | 6 | 36° | | M Matte Silver |
| 4 | 0 | 3000K | | S Silver Chrome |
| 5 | 5 | 4000K | | W Matte White |

COB Max. 5.4W 150mA 550lm 3000K




Ø55



30°



355°

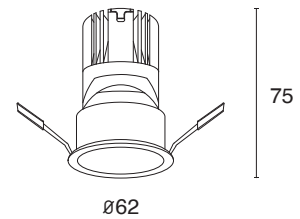

Trim Color Options



B **W**
Black White

Reflector Color Options



B **D** **M** **S** **W**
Matte Black Dark Chrome Matte Silver Silver Chrome Matte White

Accessory Options



Frosted Glass Diffuser
Ø27
WE Q91245



Honeycomb Louver
Ø27
WE Q91248

GALAS MINI TL

- Round trimless, recessed downlight adjustable version
- Die-cast aluminium trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Trimless Version

WE Q31349 - Angle - **90** - CRI - CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

COB Max. 5.4W 150mA 550lm 3000K

IP54 Version

WE Q31349C - Angle - **90** - CRI - CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

COB Max. 5.4W 150mA 550lm 3000K




Ø55



30°



355°



75

Ø53
Ø70(kit)


Trim Color Options



Reflector Color Options



Accessory Options



GALAS S MINI

- Square trim, recessed downlight adjustable version
- Die-cast aluminium trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Standard Version

WE Q31352S -

| | | | |
|-------|-----|-----|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 2 7 | 3 0 | 4 0 |

 - **90** -

| | | | |
|------------|-----|------------|-----------------|
| Beam Angle | CCT | Trim Color | Reflector Color |
| 1 5 | 2 7 | W White | B Matte Black |
| 2 4 | 3 0 | B Black | D Dark Chrome |
| 3 6 | 4 0 | | M Matte Silver |
| 5 5 | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 5.4W 150mA 550lm 3000K

IP54 Version

WE Q31352SC -

| | | | |
|-------|-----|-----|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 2 7 | 3 0 | 4 0 |

 - **90** -

| | | | |
|------------|-----|------------|-----------------|
| Beam Angle | CCT | Trim Color | Reflector Color |
| 1 5 | 2 7 | W White | B Matte Black |
| 2 4 | 3 0 | B Black | D Dark Chrome |
| 3 6 | 4 0 | | M Matte Silver |
| 5 5 | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 5.4W 150mA 550lm 3000K




55x55



30°



355°

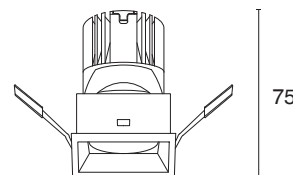

62x62

Standard Version

WE Q31352D -

| | | | |
|-------|-----|-----|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 2 7 | 3 0 | 4 0 |

 - **90** -

| | | | |
|------------|-----|------------|-----------------|
| Beam Angle | CCT | Trim Color | Reflector Color |
| 1 5 | 2 7 | W White | B Matte Black |
| 2 4 | 3 0 | B Black | D Dark Chrome |
| 3 6 | 4 0 | | M Matte Silver |
| 5 5 | | | S Silver Chrome |
| | | | W Matte White |

2 x COB Max. 5.4W 150mA 550lm 3000K

IP54 Version

WE Q31352DC -

| | | | |
|-------|-----|-----|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 2 7 | 3 0 | 4 0 |

 - **90** -

| | | | |
|------------|-----|------------|-----------------|
| Beam Angle | CCT | Trim Color | Reflector Color |
| 1 5 | 2 7 | W White | B Matte Black |
| 2 4 | 3 0 | B Black | D Dark Chrome |
| 3 6 | 4 0 | | M Matte Silver |
| 5 5 | | | S Silver Chrome |
| | | | W Matte White |

2 x COB Max. 5.4W 150mA 550lm 3000K




55x110



30°



355°

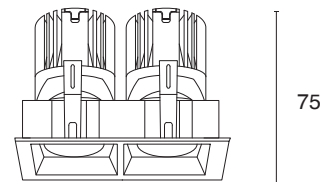

62x116

Trim Color Options



Reflector Color Options



Accessory Options



GALAS S MINI TL

- Square trimless, recessed downlight adjustable version
- Die-cast aluminium trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Trimless Version

WE Q31355S -

| | | | |
|-------|-----|-------|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 7 | 2700K | W |
| 2 4 | 0 | 3000K | B |
| 3 6 | 0 | 4000K | M |
| 5 5 | | | S |

 - **90** -

| | | | |
|------------|-----|------------|-----------------|
| Beam Angle | CCT | Trim Color | Reflector Color |
| 1 5 | 2 7 | W White | B Matte Black |
| 2 4 | 3 0 | B Black | D Dark Chrome |
| 3 6 | 4 0 | | M Matte Silver |
| 5 5 | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 5.4W 150mA 550lm 3000K

IP54 Version


WE Q31355SC -

| | | | |
|-------|-----|-------|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 7 | 2700K | W |
| 2 4 | 0 | 3000K | B |
| 3 6 | 0 | 4000K | M |
| 5 5 | | | S |

 - **90** -

| | | | |
|------------|-----|------------|-----------------|
| Beam Angle | CCT | Trim Color | Reflector Color |
| 1 5 | 2 7 | W White | B Matte Black |
| 2 4 | 3 0 | B Black | D Dark Chrome |
| 3 6 | 4 0 | | M Matte Silver |
| 5 5 | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 5.4W 150mA 550lm 3000K



Trimless Version

WE Q31355D -

| | | | |
|-------|-----|-------|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 7 | 2700K | W |
| 2 4 | 0 | 3000K | B |
| 3 6 | 0 | 4000K | M |
| 5 5 | | | S |

 - **90** -

| | | | |
|------------|-----|------------|-----------------|
| Beam Angle | CCT | Trim Color | Reflector Color |
| 1 5 | 2 7 | W White | B Matte Black |
| 2 4 | 3 0 | B Black | D Dark Chrome |
| 3 6 | 4 0 | | M Matte Silver |
| 5 5 | | | S Silver Chrome |
| | | | W Matte White |

2 x COB Max. 5.4W 150mA 550lm 3000K

IP54 Version


WE Q31355DC -

| | | | |
|-------|-----|-------|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 7 | 2700K | W |
| 2 4 | 0 | 3000K | B |
| 3 6 | 0 | 4000K | M |
| 5 5 | | | S |

 - **90** -

| | | | |
|------------|-----|------------|-----------------|
| Beam Angle | CCT | Trim Color | Reflector Color |
| 1 5 | 2 7 | W White | B Matte Black |
| 2 4 | 3 0 | B Black | D Dark Chrome |
| 3 6 | 4 0 | | M Matte Silver |
| 5 5 | | | S Silver Chrome |
| | | | W Matte White |

2 x COB Max. 5.4W 150mA 550lm 3000K

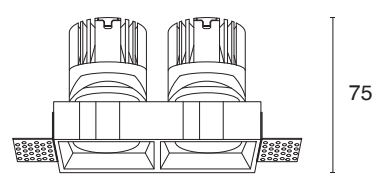


Trim Color Options



Reflector Color Options



Accessory Options





GALAS SERIES

GALAS+ SERIES  350mA 12.6W

GALAS MR16 SERIES

GALAS
GALAS TL
GALAS S
GALAS S TL

GALAS+
GALAS+ TL
GALAS+ S
GALAS S+ TL

GALAS MR16
GALAS TL MR16
GALAS S MR16
GALAS S TL MR16



83

GALAS

- Round trim, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Standard Version

WE Q31347 - Angle - **90** - CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

COB Max. 10.8W 300mA 1248lm 3000K

IP54 Version

WE Q31347C - Angle - **90** - CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

COB Max. 10.8W 300mA 1248lm 3000K




Ø75



30°



355°

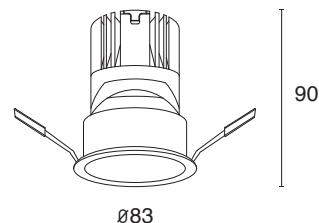


Trim Color Options



Reflector Color Options



Accessory Options



GALAS TL

- Round trimless, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Trimless Version

WE Q31350 - Angle - **90** CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

COB Max. 10.8W 300mA 1248lm 3000K

IP54 Version

WE Q31350C - Angle - **90** CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

COB Max. 10.8W 300mA 1248lm 3000K




Ø75



30°



355°



90

Ø71
Ø95(kit)

Trim Color Options



B White
W Black

Reflector Color Options



B Matte Black
D Dark Chrome
M Matte Silver
S Silver Chrome
W Matte White

Accessory Options



Frosted Glass Diffuser
Ø35

WE Q91246



Honeycomb Louver
Ø35

WE Q91249

GALAS S

- Square trim, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Standard Version

WE Q31353S - Angle - **90** - CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

1 x COB Max. 10.8W 300mA 1248lm 3000K

IP54 Version

WE Q31353SC - Angle - **90** - CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

1 x COB Max. 10.8W 300mA 1248lm 3000K




75x75



30°



355°

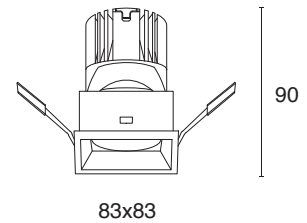

Standard Version

WE Q31353D - Angle - **90** - CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

2 x COB Max. 10.8W 300mA 1248lm 3000K

IP54 Version

WE Q31353DC - Angle - **90** - CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

2 x COB Max. 10.8W 300mA 1248lm 3000K




75x150



30°



355°

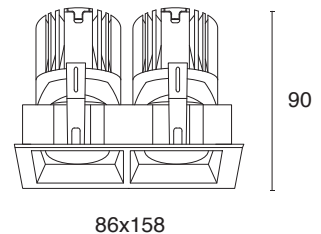


Trim Color Options



Reflector Color Options



Accessory Options



GALAS S TL

- Square trimless, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Trimless Version

WE Q31356S - Angle - **90** CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

1 x COB Max. 10.8W 300mA 1248lm 3000K

IP54 Version

WE Q31356SC - Angle - **90** CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

1 x COB Max. 10.8W 300mA 1248lm 3000K




75x75



30°



355°



90

72x72
98x98(kit)

Trimless Version

WE Q31356D - Angle - **90** CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

2 x COB Max. 10.8W 300mA 1248lm 3000K

IP54 Version

WE Q31356DC - Angle - **90** CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | |
|------------|---|-----|---|------------|--------------|-----------------|---------------|
| 1 | 5 | 2 | 7 | W | White | B | Matte Black |
| 2 | 4 | 3 | 0 | B | Black | D | Dark Chrome |
| 3 | 6 | 4 | 0 | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | | | W | Matte White | | |

2 x COB Max. 10.8W 300mA 1248lm 3000K




75x75



30°



355°

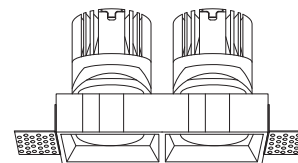

90

72x115
72x205(kit)


Trim Color Options



Reflector Color Options



Accessory Options



GALAS+

- Round trim, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Standard Version

WE Q31447 - Angle - **90** CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | | | |
|------------|---|-----|---|------------|-------|-----------------|--------------|-------------|---------------|
| 1 | 5 | 15° | 2 | 7 | 2700K | W | White | B | Matte Black |
| 2 | 4 | 24° | 3 | 0 | 3000K | B | Black | D | Dark Chrome |
| 3 | 6 | 36° | 4 | 0 | 4000K | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | 55° | | | | | W | Matte White | |

COB Max. 12.6W 350mA 1248lm 3000K

IP54 Version

WE Q31447C - Angle - **90** CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | | | |
|------------|---|-----|---|------------|-------|-----------------|--------------|-------------|---------------|
| 1 | 5 | 15° | 2 | 7 | 2700K | W | White | B | Matte Black |
| 2 | 4 | 24° | 3 | 0 | 3000K | B | Black | D | Dark Chrome |
| 3 | 6 | 36° | 4 | 0 | 4000K | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | 55° | | | | | W | Matte White | |

COB Max. 12.6W 350mA 1248lm 3000K




Ø75



30°



355°

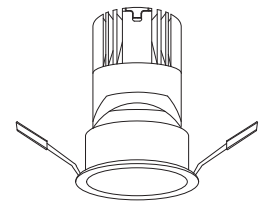

104

Ø83

Trim Color Options



B White
W Black

Reflector Color Options



B Matte Black
D Dark Chrome
M Matte Silver
S Silver Chrome
W Matte White

Accessory Options



Frosted Glass Diffuser
Ø35
WE Q91246



Honeycomb Louver
Ø35
WE Q91249

GALAS+ TL

- Round trimless, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Trimless Version

WE Q31450 - Angle - CRI **90** - CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | | | |
|------------|---|-----|---|------------|-------|-----------------|-------|---------------|--------------|
| 1 | 5 | 15° | 2 | 7 | 2700K | W | White | B | Matte Black |
| 2 | 4 | 24° | 3 | 0 | 3000K | B | Black | D | Dark Chrome |
| 3 | 6 | 36° | 4 | 0 | 4000K | | | M | Matte Silver |
| 5 | 5 | 55° | | | | | S | Silver Chrome | |
| | | | | | | | W | Matte White | |


COB Max. 12.6W 350mA 1248lm 3000K

IP54 Version

WE Q31450C - Angle - CRI **90** - CCT - Color

| Beam Angle | | CCT | | Trim Color | | Reflector Color | | | |
|------------|---|-----|---|------------|-------|-----------------|-------|---------------|--------------|
| 1 | 5 | 15° | 2 | 7 | 2700K | W | White | B | Matte Black |
| 2 | 4 | 24° | 3 | 0 | 3000K | B | Black | D | Dark Chrome |
| 3 | 6 | 36° | 4 | 0 | 4000K | | | M | Matte Silver |
| 5 | 5 | 55° | | | | | S | Silver Chrome | |
| | | | | | | | W | Matte White | |

COB Max. 12.6W 350mA 1248lm 3000K

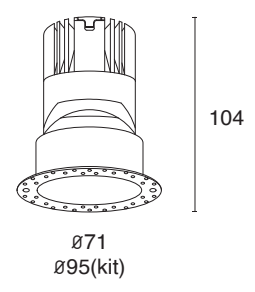


Trim Color Options



Reflector Color Options



Accessory Options



GALAS+ S

- Square trim, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Standard Version

WE Q31453S -

| | | | | | |
|-------|-----|-----|-------|---|-----------------|
| Angle | - | CRI | CCT | - | Color |
| 1 5 | 15° | 2 7 | 2700K | - | W White |
| 2 4 | 24° | 3 0 | 3000K | - | B Black |
| 3 6 | 36° | 4 0 | 4000K | - | M Matte Silver |
| 5 5 | 55° | | | - | S Silver Chrome |
| | | | | - | W Matte White |

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 12.6W 350mA 1248lm 3000K

IP54 Version

WE Q31453SC -

| | | | | | |
|-------|-----|-----|-------|---|-----------------|
| Angle | - | CRI | CCT | - | Color |
| 1 5 | 15° | 2 7 | 2700K | - | W White |
| 2 4 | 24° | 3 0 | 3000K | - | B Black |
| 3 6 | 36° | 4 0 | 4000K | - | M Matte Silver |
| 5 5 | 55° | | | - | S Silver Chrome |
| | | | | - | W Matte White |

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 12.6W 350mA 1248lm 3000K




75x75



30°



355°

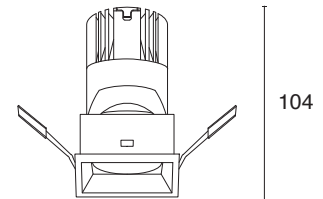

82x82

Standard Version

WE Q31453D -

| | | | | | |
|-------|-----|-----|-------|---|-----------------|
| Angle | - | CRI | CCT | - | Color |
| 1 5 | 15° | 2 7 | 2700K | - | W White |
| 2 4 | 24° | 3 0 | 3000K | - | B Black |
| 3 6 | 36° | 4 0 | 4000K | - | M Matte Silver |
| 5 5 | 55° | | | - | S Silver Chrome |
| | | | | - | W Matte White |

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

2 x COB Max. 12.6W 350mA 1248lm 3000K

IP54 Version

WE Q31453DC -

| | | | | | |
|-------|-----|-----|-------|---|-----------------|
| Angle | - | CRI | CCT | - | Color |
| 1 5 | 15° | 2 7 | 2700K | - | W White |
| 2 4 | 24° | 3 0 | 3000K | - | B Black |
| 3 6 | 36° | 4 0 | 4000K | - | M Matte Silver |
| 5 5 | 55° | | | - | S Silver Chrome |
| | | | | - | W Matte White |

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

2 x COB Max. 12.6W 350mA 1248lm 3000K




75x150



30°



355°

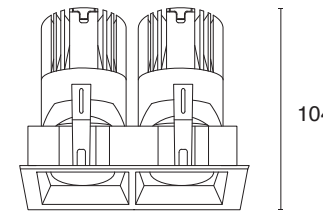

86x158


Trim Color Options



Reflector Color Options



Accessory Options



GALAS+ S TL

- Square trimless, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Trimless Version

WE Q31456S - 90

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 10.8W 300mA 1248lm 3000K

IP54 Version

WE Q31456SC - 90

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 10.8W 300mA 1248lm 3000K




75x75



30°



355°



104

72x72
98x98(kit)

Trimless Version

WE Q31456D - 90

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 10.8W 300mA 1248lm 3000K

IP54 Version

WE Q31456DC - 90

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

2 x COB Max. 10.8W 300mA 1248lm 3000K




72x150



30°



355°

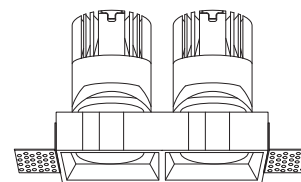

104

72x115
72x205(kit)

Trim Color Options



B White
Black

Reflector Color Options



B Matte Black
D Dark Chrome
M Matte Silver
S Silver Chrome
W Matte White

Accessory Options



Frosted Glass Diffuser
ø35
WE Q91246



Honeycomb Louver
ø35
WE Q91249

GALAS MR16

- Round trim, retrofit MR16 version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- MR16 lamp bulb and remote driver to be separate order



Standard Version

WE Q31347 - R - Color

| Trim Color | | Reflector Color | |
|---|-------|---|---------------|
| W | White | B | Matte Black |
| B | Black | D | Dark Chrome |
| | | M | Matte Silver |
| | | S | Silver Chrome |
| | | W | Matte White |


Gx 5.3 Max. 15W LED Retrofit MR16 lamp

IP54 Version

WE Q31347C - R - Color

| Trim Color | | Reflector Color | |
|---|-------|---|---------------|
| W | White | B | Matte Black |
| B | Black | D | Dark Chrome |
| | | M | Matte Silver |
| | | S | Silver Chrome |
| | | W | Matte White |

Gx 5.3 Max. 15W LED Retrofit MR16 lamp

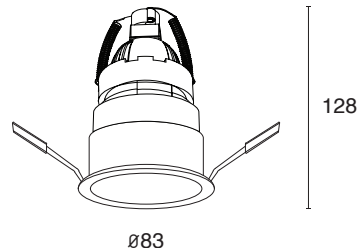

Trim Color Options



Reflector Color Options



Accessory Options



GALAS TL MR16

- Round trimless, retrofit MR16 version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- MR16 lamp bulb and remote driver to be separate order



Trimless Version

WE Q31350 - R - Color

| Trim Color | | Reflector Color | |
|---|-------|---|---------------|
| W | White | B | Matte Black |
| B | Black | D | Dark Chrome |
| | | M | Matte Silver |
| | | S | Silver Chrome |
| | | W | Matte White |

Gx 5.3 Max. 15W LED Retrofit MR16 lamp

IP54 Version

WE Q31350C - R - Color

| Trim Color | | Reflector Color | |
|---|-------|---|---------------|
| W | White | B | Matte Black |
| B | Black | D | Dark Chrome |
| | | M | Matte Silver |
| | | S | Silver Chrome |
| | | W | Matte White |

Gx 5.3 Max. 15W LED Retrofit MR16 lamp




Ø75



30°



355°



128

Ø71
Ø95(kit)

Trim Color Options



Reflector Color Options



Accessory Options



GALAS S MR16

- Square trim, retrofit MR16 version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- MR16 lamp bulb and remote driver to be separate order



Standard Version

WE Q31353S - R -

| Color | |
|-------------------|------------------------|
| Trim Color | Reflector Color |
| W White | B Matte Black |
| B Black | D Dark Chrome |
| | M Matte Silver |
| | S Silver Chrome |
| | W Matte White |


1 x Gx 5.3 Max. 15W LED Retrofit MR16 lamp

IP54 Version

WE Q31353SC - R -

| Color | |
|-------------------|------------------------|
| Trim Color | Reflector Color |
| W White | B Matte Black |
| B Black | D Dark Chrome |
| | M Matte Silver |
| | S Silver Chrome |
| | W Matte White |

1 x Gx 5.3 Max. 15W LED Retrofit MR16 lamp

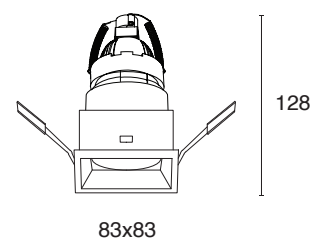

Standard Version

WE Q31353D - R -

| Color | |
|-------------------|------------------------|
| Trim Color | Reflector Color |
| W White | B Matte Black |
| B Black | D Dark Chrome |
| | M Matte Silver |
| | S Silver Chrome |
| | W Matte White |


2 x Gx 5.3 Max. 15W LED Retrofit MR16 lamp

IP54 Version

WE Q31353DC - R -

| Color | |
|-------------------|------------------------|
| Trim Color | Reflector Color |
| W White | B Matte Black |
| B Black | D Dark Chrome |
| | M Matte Silver |
| | S Silver Chrome |
| | W Matte White |

2 x Gx 5.3 Max. 15W LED Retrofit MR16 lamp

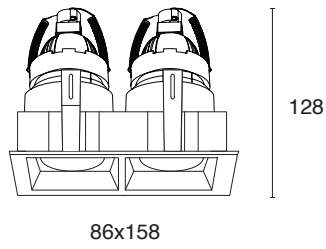

Trim Color Options



Reflector Color Options



Accessory Options



GALAS S TL MR16

- Square trimless, retrofit MR16 version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- MR16 lamp bulb and remote driver to be separate order



Trimless Version

WE Q31356S - R -

| Color | |
|-------------------|------------------------|
| Trim Color | Reflector Color |
| W White | B Matte Black |
| B Black | D Dark Chrome |
| | M Matte Silver |
| | S Silver Chrome |
| | W Matte White |

1 x Gx 5.3 Max. 15W LED Retrofit MR16 lamp

IP54 Version

WE Q31356SC - R -

| Color | |
|-------------------|------------------------|
| Trim Color | Reflector Color |
| W White | B Matte Black |
| B Black | D Dark Chrome |
| | M Matte Silver |
| | S Silver Chrome |
| | W Matte White |

1 x Gx 5.3 Max. 15W LED Retrofit MR16 lamp




75x75



30°



355°



128

72x72
98x98(kit)

Trimless Version

WE Q31356D - R -

| Color | |
|-------------------|------------------------|
| Trim Color | Reflector Color |
| W White | B Matte Black |
| B Black | D Dark Chrome |
| | M Matte Silver |
| | S Silver Chrome |
| | W Matte White |

2 x Gx 5.3 Max. 15W LED Retrofit MR16 lamp

IP54 Version

WE Q31356DC - R -

| Color | |
|-------------------|------------------------|
| Trim Color | Reflector Color |
| W White | B Matte Black |
| B Black | D Dark Chrome |
| | M Matte Silver |
| | S Silver Chrome |
| | W Matte White |

2 x Gx 5.3 Max. 15W LED Retrofit MR16 lamp




75x75



30°



355°

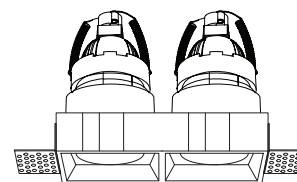

128

72x115
72x205(kit)

Trim Color Options



Reflector Color Options



Accessory Options





105

GALAS MAX SERIES

GALAS MAX
GALAS MAX TL
GALAS S MAX
GALAS S MAX TL

GALAS MAX

- Round trim, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Standard Version

WE Q31348 - Angle - **90** CRI CCT - Color

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

COB Max. 18W 500mA 1762lm 3000K

IP54 Version

WE Q31348C - Angle - **90** CRI CCT - Color

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

COB Max. 18W 500mA 1762lm 3000K




Ø95



30°



355°



114

Ø105

Trim Color Options



Black White

Reflector Color Options



Matte Black Dark Chrome Matte Silver Silver Chrome Matte White

Accessory Options



Frosted Glass Diffuser
Ø50

WE Q91247



Honeycomb Louver
Ø50

WE Q91250

GALAS MAX TL

- Round trimless, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Trimless Version

WE Q31351 - Angle - **90** - CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | Reflector Color | | | | |
|------------|---|-----|---|------------|-----------------|-------------|--------------|---|---------------|
| 1 | 5 | 15° | 2 | 7 | 2700K | W | White | B | Matte Black |
| 2 | 4 | 24° | 3 | 0 | 3000K | B | Black | D | Dark Chrome |
| 3 | 6 | 36° | 4 | 0 | 4000K | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | 55° | | | W | Matte White | | | |

COB Max. 18W 500mA 1762lm 3000K

IP54 Version

WE Q31351C - Angle - **90** - CRI CCT - Color

| Beam Angle | | CCT | | Trim Color | Reflector Color | | | | |
|------------|---|-----|---|------------|-----------------|-------------|--------------|---|---------------|
| 1 | 5 | 15° | 2 | 7 | 2700K | W | White | B | Matte Black |
| 2 | 4 | 24° | 3 | 0 | 3000K | B | Black | D | Dark Chrome |
| 3 | 6 | 36° | 4 | 0 | 4000K | M | Matte Silver | S | Silver Chrome |
| 5 | 5 | 55° | | | W | Matte White | | | |

COB Max. 18W 500mA 1762lm 3000K




Ø95



30°



355°



114

Ø92
Ø120(kit)

Trim Color Options



Black White

Reflector Color Options



Matte Black Dark Chrome Matte Silver Silver Chrome Matte White

Accessory Options



Frosted Glass Diffuser
Ø50

WE Q91247



Honeycomb Louver
Ø50

WE Q91250

GALAS S MAX

- Square trim, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Standard Version

WE Q31354S -

| | | | |
|-------|-------|-------|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 2 7 | 3 0 | 4 0 |
| 15° | 2700K | 3000K | 4000K |

 - 90°

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 18W 500mA 1762lm 3000K

IP54 Version

WE Q31354SC -

| | | | |
|-------|-------|-------|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 2 7 | 3 0 | 4 0 |
| 15° | 2700K | 3000K | 4000K |

 - 90°

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 18W 500mA 1762lm 3000K




95x95



30°



355°



114

103x103

Standard Version

WE Q31354D -

| | | | |
|-------|-------|-------|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 2 7 | 3 0 | 4 0 |
| 15° | 2700K | 3000K | 4000K |

 - 90°

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

2 x COB Max. 18W 500mA 1762lm 3000K

IP54 Version

WE Q31354DC -

| | | | |
|-------|-------|-------|-------|
| Angle | CRI | CCT | Color |
| 1 5 | 2 7 | 3 0 | 4 0 |
| 15° | 2700K | 3000K | 4000K |

 - 90°

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

2 x COB Max. 18W 500mA 1762lm 3000K




95x190



30°



355°



114

107x198

Trim Color Options



B White
W Black

Reflector Color Options



B Matte Black
D Dark Chrome
M Matte Silver
S Silver Chrome
W Matte White

Accessory Options



Frosted Glass Diffuser
Ø50
WE Q91247



Honeycomb Louver
Ø50
WE Q91250

GALAS S MAX TL

- Square trimless, recessed downlight adjustable version
- Die-cast aluminum trim
- Anti-dazzle reflector with 5 color options
- No-tilting gap
- Easy maintenance design
- IP54 version available on request



Trimless Version

WE Q31357S -

| | | | | |
|-------|---|-----|-----|-------|
| Angle | - | CRI | CCT | Color |
| | - | - | - | - |

- 90

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 18W 500mA 1762lm 3000K

IP54 Version

WE Q31357SC -

| | | | | |
|-------|---|-----|-----|-------|
| Angle | - | CRI | CCT | Color |
| | - | - | - | - |

- 90

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

1 x COB Max. 18W 500mA 1762lm 3000K




95x95



30°



355°



114

90x90
120x120(kit)

Trimless Version

WE Q31357D -

| | | | | |
|-------|---|-----|-----|-------|
| Angle | - | CRI | CCT | Color |
| | - | - | - | - |

- 90

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

2 x COB Max. 18W 500mA 1762lm 3000K

IP54 Version

WE Q31357DC -

| | | | | |
|-------|---|-----|-----|-------|
| Angle | - | CRI | CCT | Color |
| | - | - | - | - |

- 90

| Beam Angle | CCT | Trim Color | Reflector Color |
|------------|-----------|------------|-----------------|
| 1 5 15° | 2 7 2700K | W White | B Matte Black |
| 2 4 24° | 3 0 3000K | B Black | D Dark Chrome |
| 3 6 36° | 4 0 4000K | | M Matte Silver |
| 5 5 55° | | | S Silver Chrome |
| | | | W Matte White |

2 x COB Max. 18W 500mA 1762lm 3000K




95x190



30°



355°

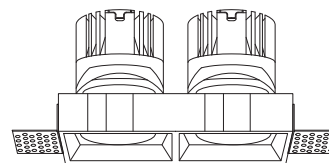

114

91x182
91x242(kit)

Trim Color Options



B White
Black

Reflector Color Options



B Matte Black
D Dark Chrome
M Matte Silver
S Silver Chrome
W Matte White

Accessory Options



Frosted Glass Diffuser
Ø50
WE Q91247



Honeycomb Louver
Ø50
WE Q91250

150mA Constant Current Driver

| Order Code | Driving Power | Output Current | Wiring Box Dimensions L x W x H (mm) | Required Cut Hole (mm) |
|-------------------------------------|---------------|-------------------------|---|------------------------------|
| <i>TD EG-150mA-8N-LS1 (15A)</i> | 4.5-6.3W | 150mA | 200 x 54 x 41 | Ø65 Access panel required |
| <i>TD LT-100.400mA-12A-SE (16A)</i> | 1.5-6.3W | 150mA 1-10V dimmable | 260 x 54 x 41 | Ø65 Access panel required |

300mA Constant Current Driver

| Order Code | Driving Power | Output Current | Wiring Box Dimensions L x W x H (mm) | Required Cut Hole (mm) |
|-------------------------------------|---------------|-------------------------|---|---------------------------|
| <i>TD EG-300mA-12N-LS2 (15A)</i> | 9-12.6W | 300mA | 200 x 54 x 41 | Ø65 |
| <i>TD LT-100.400mA-12A-SE (16A)</i> | 4.2-12W | 300mA 1-10V dimmable | 260 x 54 x 41 | Ø65 |

350mA Constant Current Driver

| Order Code | Driving Power | Output Current | Wiring Box Dimensions L x W x H (mm) | Required Cut Hole (mm) |
|-------------------------------------|---------------|-------------------------|---|---------------------------|
| <i>TD EG-350mA-12N-LSE (15A)</i> | 10.4-14W | 350mA | 200 x 54 x 41 | Ø65 |
| <i>TD LT-100.700mA-20A-NE (16A)</i> | 3.5-14.7W | 350mA 1-10V dimmable | 260 x 54 x 41 | Ø65 |

500mA Constant Current Driver

| Order Code | Driving Power | Output Current | Wiring Box Dimensions L x W x H (mm) | Required Cut Hole (mm) |
|-------------------------------------|---------------|-------------------------|---|---------------------------|
| <i>TD EG-500mA-21N-LS9 (16A)</i> | 12-21W | 500mA | 200 x 54 x 41 | Ø65 |
| <i>TD LT-100.700mA-20A-NE (16A)</i> | 2-36W | 500mA 1-10V dimmable | 260 x 54 x 41 | Ø65 |

12V Step-down Transformer

| Order Code | Driving Power | Wiring Box Dimensions L x W x H (mm) | Required Cut Hole (mm) |
|----------------------------------|---|---|---------------------------|
| <i>TD PH-12V-10P-EDEV1 (15A)</i> | 12V Step-down Transformer for Retrofit MR16 | 200 x 54 x 41 | Ø65 |

Accessory Options



Frosted Glass Diffuser



Honeycomb Louver



www.welighting.com



WELIGHTING



+852 2359 9866



mail@welighting.com



Unit 01-07, 22/F, CEO Tower,
77 Wing Hong Street, Lai Chi Kok, Hong Kong

WELIGHTING

www.welighting.com

© 2024 We Lighting Ltd. All rights reserved.