

VIVA

REFLECTOR DOWNLIGHT SERIES

WELIGHTING

SHINE IN A BRIGHTER WAY

VIVA


- Die-cast aluminum trim and body
- Round Trim
- Polycarbonate secondary anti-glare reflector in 4 color options
- Accessories on secondary reflector available on request
- Standard with Bridgelux COB
- Remote Driver, separate order



Adjustable

Angle	CRI	CCT	Color
WE B31180 -	- 90		
BEAM ANGLE	CCT	COLOR	
1 5 15°	2 7 2700K	W D	White Trim, Dark Chrome Reflector
2 4 24°	3 0 3000K	W G	White Trim, Gold Reflector
3 6 36°	4 0 4000K	W S	White Trim, Silver Reflector
5 5 55°		W W	White Trim, Matt White Reflector


COB / max. 25.6W / 700mA / 3374lm / CRI90 / 3000K

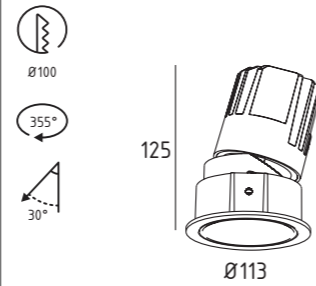


Fixed

Angle	CRI	CCT	Color
WE B31181 -	- 90		
BEAM ANGLE	CCT	COLOR	
1 5 15°	2 7 2700K	W D	White Trim, Dark Chrome Reflector
2 4 24°	3 0 3000K	W G	White Trim, Gold Reflector
3 6 36°	4 0 4000K	W S	White Trim, Silver Reflector
5 5 55°		W W	White Trim, Matt White Reflector


COB / max. 25.6W / 700mA / 3374lm / CRI90 / 3000K

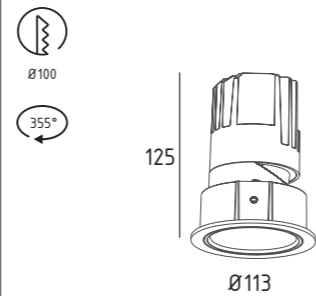


Reflector Color

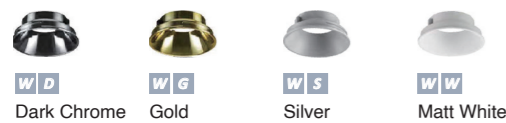


Accessory Options



X91105
Honeycomb Louver




X91106
Spread Lens



X91107
Linear Spread Lens

Photometric Diagrams 25.6W 700mA

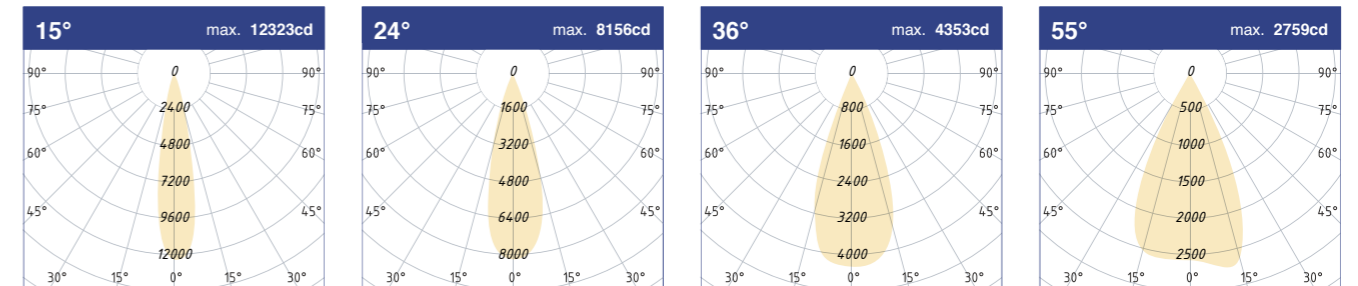


Constant Current Driver

Order Code	Driving Power	Output	Wiring Box Dimensions L x W x H (mm)	Required Cut Hole (mm)
TD EG-700mA-30N-L55(16A)	18 - 30W	700mA	260 x 54 x 41	Ø63
TD LT-SETmA-36A-AD(16A)	12 - 36W	700mA 1-10V dimmable		

VIVA TL

- Trimless version with installation kit
- Polycarbonate secondary anti-glare reflector in 4 color options
- Accessories on secondary reflector available on request
- Standard with Bridgelux COB
- Remote driver, separate order

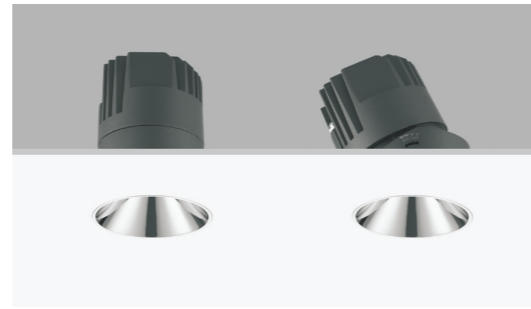


Adjustable

WE B31182 - Angle - 90 - CRI - CCT - Color

BEAM ANGLE	CCT	COLOR
1 5 15°	2 7 2700K	W D Dark Chrome Reflector
2 4 24°	3 0 3000K	W G Gold Reflector
3 6 36°	4 0 4000K	W S Silver Reflector
5 5 55°		W W Matt White Reflector

COB / max. 25.6W / 700mA / 3374lm / CRI90 / 3000K

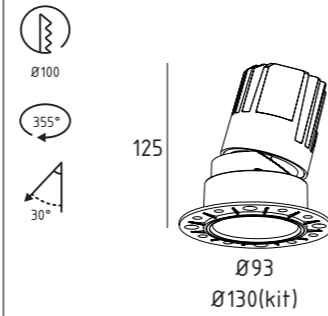


Fixed


WE B31183 - Angle - 90 - CRI - CCT - Color

BEAM ANGLE	CCT	COLOR
1 5 15°	2 7 2700K	W D Dark Chrome Reflector
2 4 24°	3 0 3000K	W G Gold Reflector
3 6 36°	4 0 4000K	W S Silver Reflector
5 5 55°		W W Matt White Reflector


COB / max. 25.6W / 700mA / 3374lm / CRI90 / 3000K

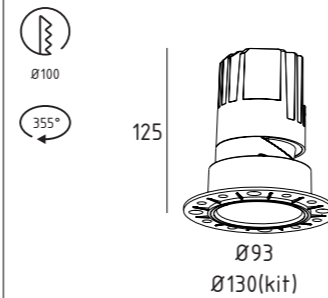


Reflector Color

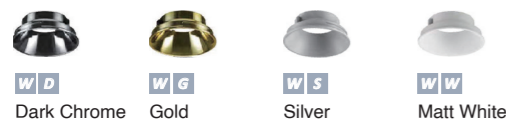


Accessory Options



X91105
Honeycomb Louver




X91106
Spread Lens



X91107
Linear Spread Lens

Photometric Diagrams 25.6W 700mA

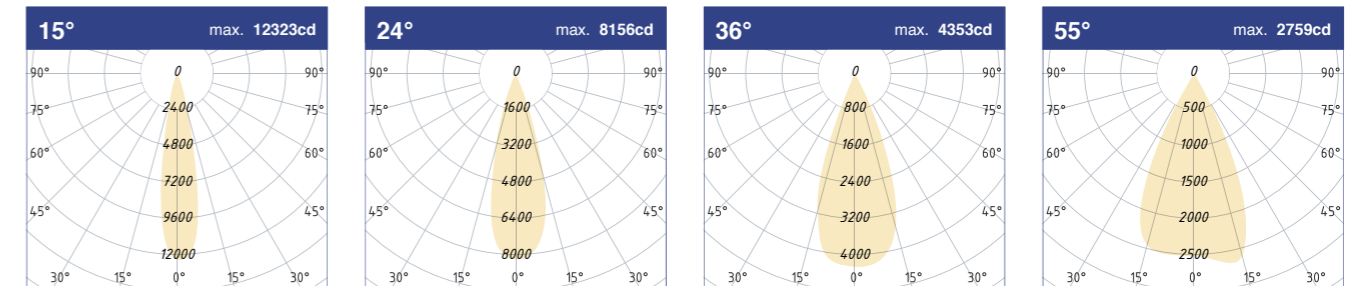


Constant Current Driver

Order Code	Driving Power	Output	Wiring Box Dimensions L x W x H (mm)	Required Cut Hole (mm)
TD EG-700mA-30N-L55(16A)	18 - 30W	700mA	260 x 54 x 41	Ø63
TD LT-SETmA-36A-AD(16A)	12 - 36W	700mA 1-10V dimmable		

VIVA Mini TL

- Trimless version with installation kit
- Polycarbonate secondary anti-glare reflector in 4 color options
- Accessories on secondary reflector available on request
- Standard with Bridgelux COB
- Remote driver, separate order

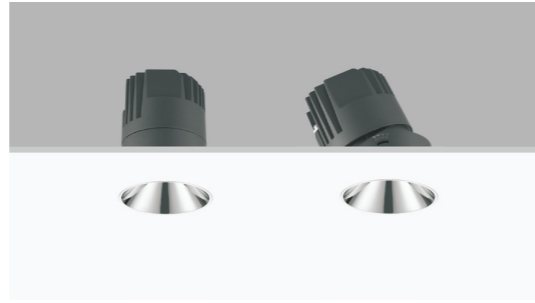


Adjustable

WE B31190 - Angle - 90 - CRI - CCT - Color

BEAM ANGLE	CCT	COLOR
1 5 15°	2 7 2700K	W D Dark Chrome Reflector
2 4 24°	3 0 3000K	W G Gold Reflector
3 6 36°	4 0 4000K	W S Silver Reflector
5 5 55°		W W Matt White Reflector

COB / max. 12.6W / 350mA / 1580lm / CRI90 / 3000K

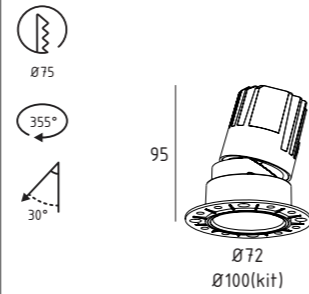


Fixed

WE B31191 - Angle - 90 - CRI - CCT - Color

BEAM ANGLE	CCT	COLOR
1 5 15°	2 7 2700K	W D Dark Chrome Reflector
2 4 24°	3 0 3000K	W G Gold Reflector
3 6 36°	4 0 4000K	W S Silver Reflector
5 5 55°		W W Matt White Reflector


COB / max. 12.6W / 350mA / 1580lm / CRI90 / 3000K

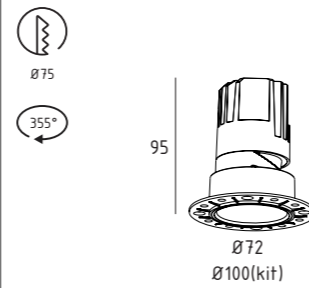


Reflector Color




Accessory Options



X91105
Honeycomb Louver




X91106
Spread Lens



X91107
Linear Spread Lens

Photometric Diagrams 12.6W 350mA

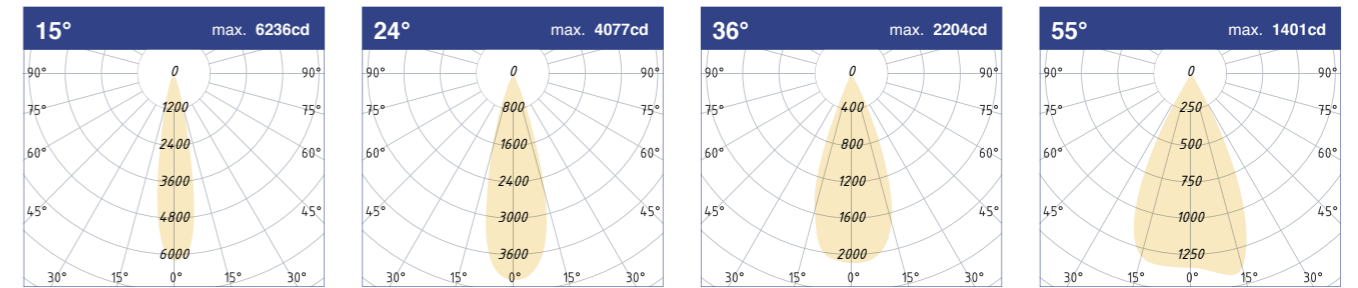

Constant Current Driver

Order Code	Driving Power	Output	Wiring Box Dimensions L x W x H (mm)	Required Cut Hole (mm)
TG EG-350mA-12N-LS2(15A)	10.5 - 14W	350mA	260 x 54 x 41	Ø63
TD LT-SETmA-15A-AD2(16A)	3.5 - 15W	350mA 1-10V dimmable		

VIVA WW


- Die-cast aluminum trim and body
- Round Trim
- Polycarbonate secondary anti-glare reflector
- Standard with Bridgelux COB
- Remote Driver, separate order



WE B31193- 90 - WS

CRI	CCT
27	2700K
30	3000K
40	4000K


COB / max. 18W / 500mA / 2246lm / CRI90 / 3000K

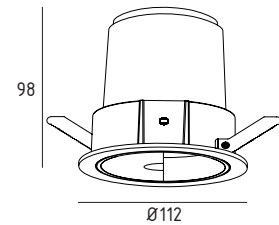

Reflector Color



Photometric Diagram

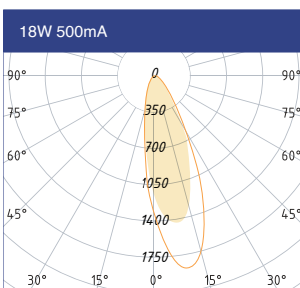

● C0.0_180.0 max. 1479cd ○ C300.0_120.0 max. 1844cd

Constant Current Driver

Order Code	Driving Power	Output	Wiring Box Dimensions L x W x H (mm)	Required Cut Hole (mm)
TD EG-500mA-30N-LS4(16A)	12.5 - 21W	500mA	260 x 54 x 41	Ø63
TD LT-SETmA-25A-AD4(16A)	5 - 21W	500mA 1-10V dimmable		

VIVA Mini WW


- Die-cast aluminum trim and body
- Round Trim
- Polycarbonate secondary anti-glare reflector
- Standard with Bridgelux COB
- Remote Driver, separate order



WE B31192- 90 - WS

CRI	CCT
27	2700K
30	3000K
40	4000K


COB / max. 9W / 250mA / 1194lm / CRI90 / 3000K



Reflector Color



Photometric Diagram

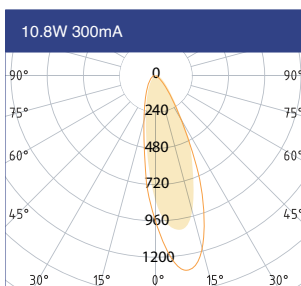

● C0.0_180.0 max. 1031cd ○ C300.0_120.0 max. 1290cd

Constant Current Driver

Order Code	Driving Power	Output	Wiring Box Dimensions L x W x H (mm)	Required Cut Hole (mm)
TD EG-300mA-12N-LS2(15A)	9 - 12W.6	300mA	200 x 54 x 41	⊗ 80
TD LT-SETmA-12A-SE7(16A)	4.2 - 12W	300mA 1-10V dimmable	260 x 54 x 41	



www.welighting.com



WELIGHTING



+852 2359 9866



mail@welighting.com



Unit 01-07, 22/F, CEO Tower,
77 Wing Hong Street, Lai Chi Kok, Hong Kong

WELIGHTING
www.welighting.com

© 2022 We Lighting Ltd. All rights reserved.