KORRIS SERIES



KORRIS SERIES

Product Features

The lamp body exhibits a minimalist and sophisticated design, offering a range of color options that enhance the aesthetic appeal of office environments

The lamp body can be effortlessly assembled into diverse configurations using its four modules, providing adaptable functionality across various spatial settings

Installation is user-friendly, as the lamp body can be seamlessly connected, enabling the chandelier to be effortlessly mounted and the light to be activated

The lamp is available in both lamp cup and floodlight variants, offering versatile lighting options to suit different preferences and requirements

Applicable Scene

Suitable for office buildings, offices, commercial spaces and other environments


Main Body Color (Customizable on Request)



Optical Components




Korris

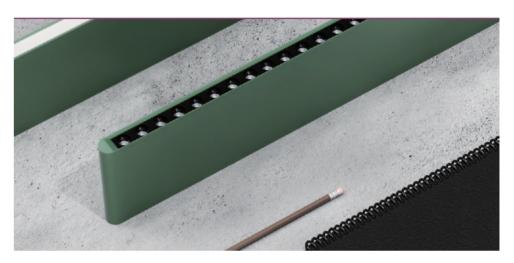


Korris Arc





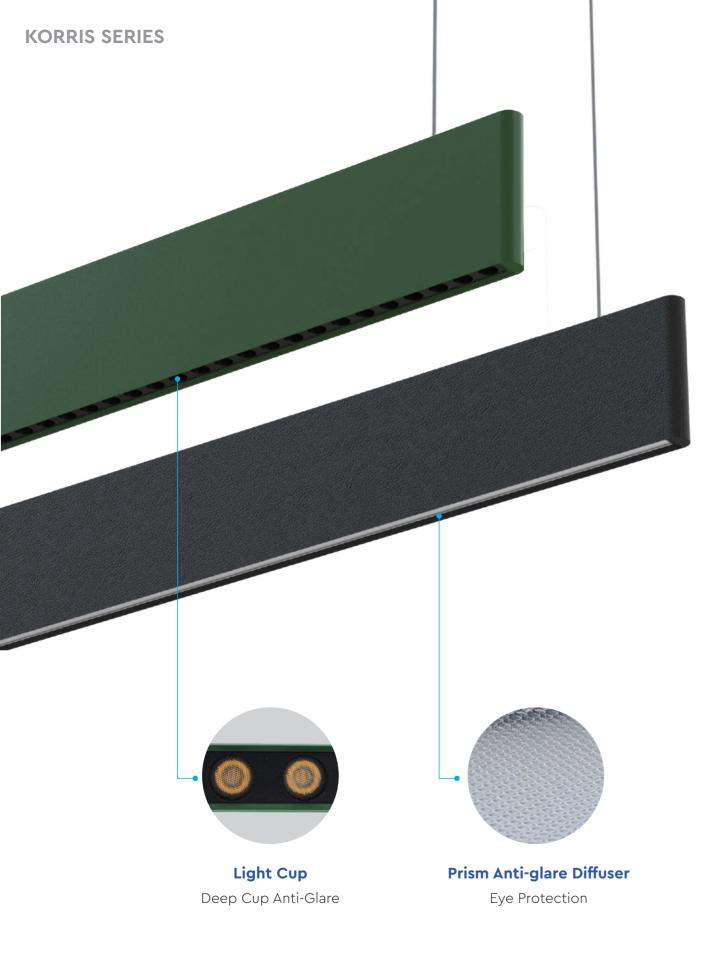

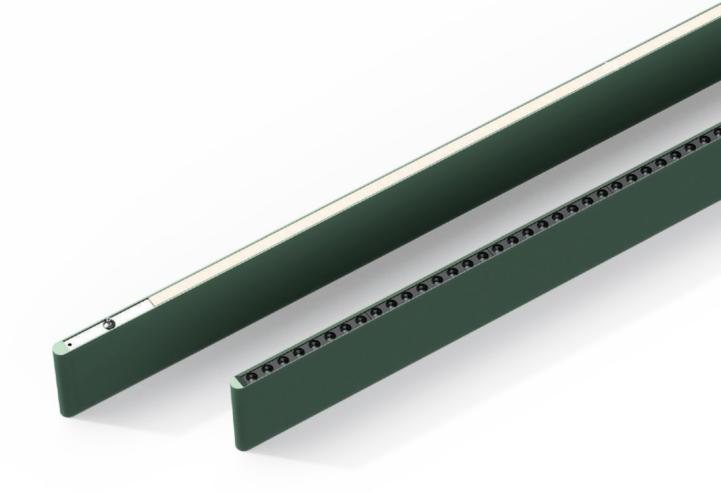

Glow Up and Down

The integration of upper and lower lighting elements generates a three-dimensional lighting environment: the lower lights effectively illuminate the entire office space, while the upper lights provide additional brightness to the ceiling, resulting in a heightened sense of illumination and fostering a more comfortable and relaxed atmosphere. This lighting solution is particularly well-suited for application in refined office settings.

Interior Lighting




Ceiling

Mounted


Color Temperature



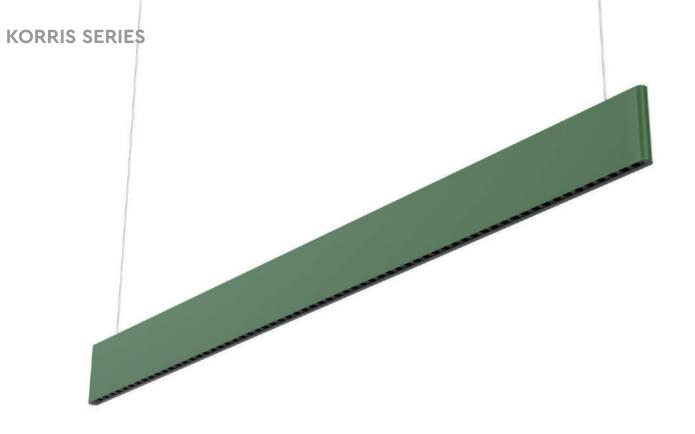

Korris - with Light Cups

Standard Parameter



Dimension (L x W x H): 1215 x 18 x 100mm

Color: Various Selection (Can be very upon request)

Power: Uplight 15W + Downlight 30W (Can be very upon request)

Lumen Output: Uplight 100lm/W + Downlight 105lm/W

Color Temperture (CCT): 3000K/ 4000K/ 5000K

CRI: Ra 90+


Dimming Option: 1-10V/ DALI/ Non-dim

Beam Angle: Uplight 100° + Downlight 36° (Can be very upon request)



Korris - with Prism Anti-glare Diffuser

Standard Parameter



Dimension (L x W x H): 1215 x 18 x 100mm

Color: Various Selection (Can be very upon request)

Power: Uplight 15W + Downlight 30W (Can be very upon request)

Lumen Output: Uplight 100lm/W + Downlight 105lm/W


Color Temperture (CCT): 3000K/ 4000K/ 5000K

CRI: Ra 90+


Dimming Option: 1-10V/ DALI/ Non-dim

Beam Angle: Uplight 100° + Downlight 36° (Can be very upon request)



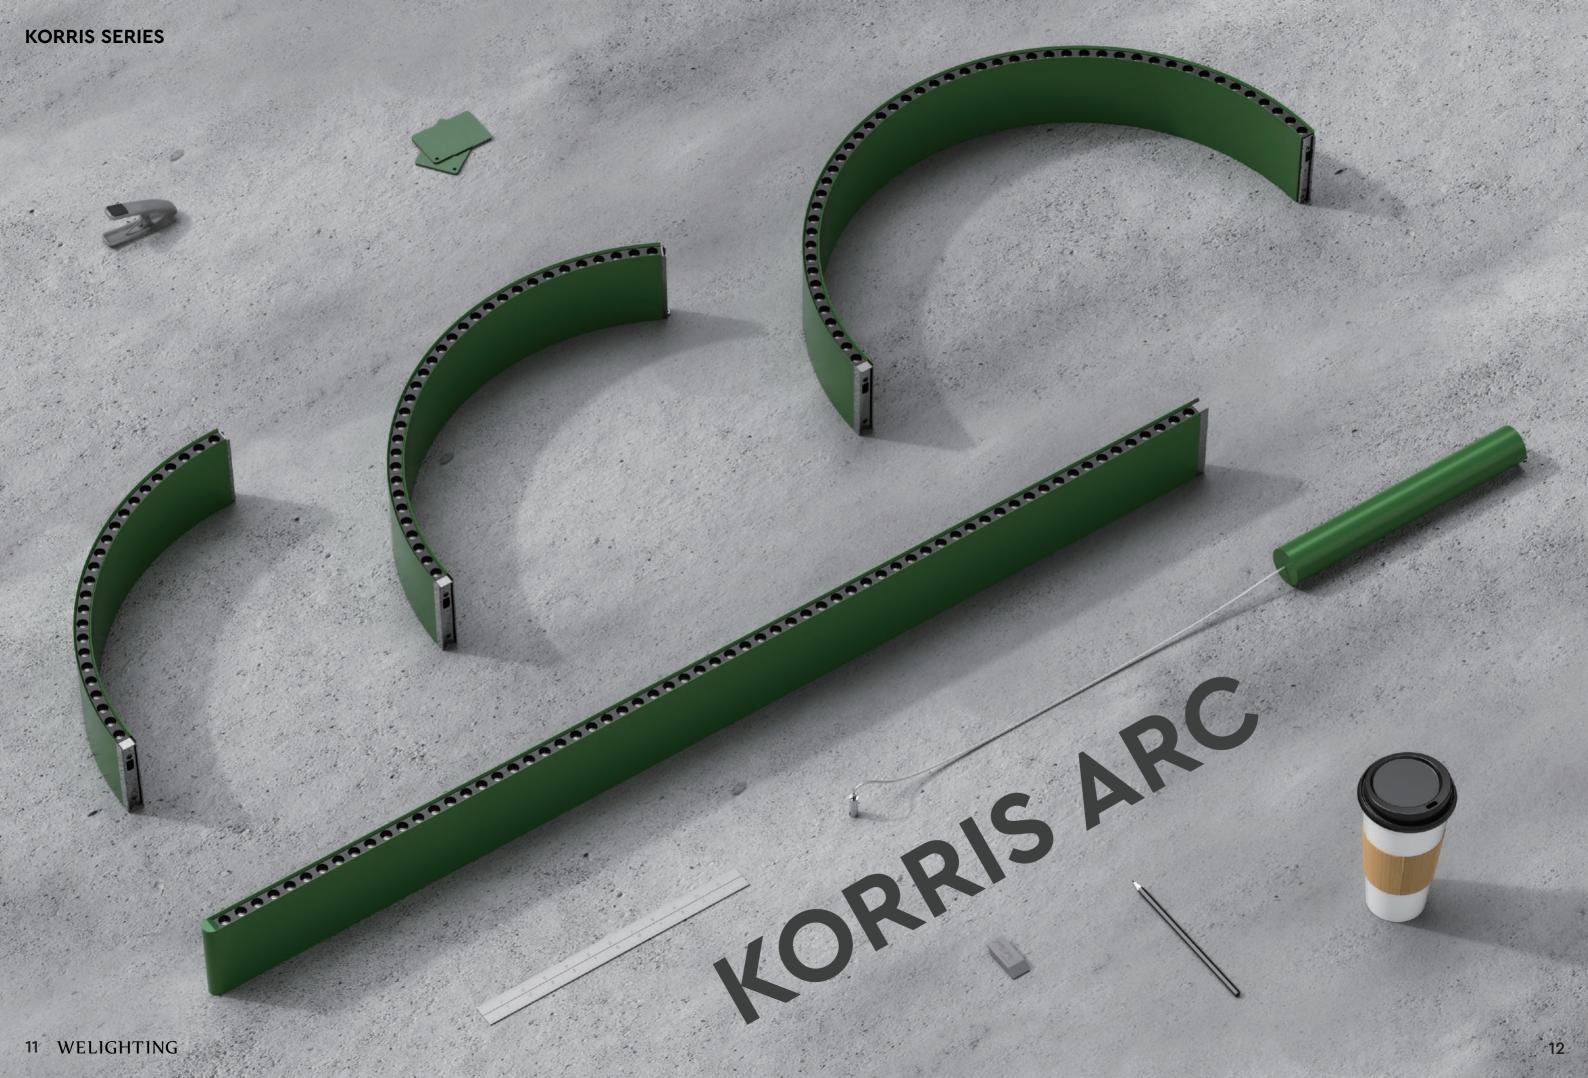

KORRIS SERIES

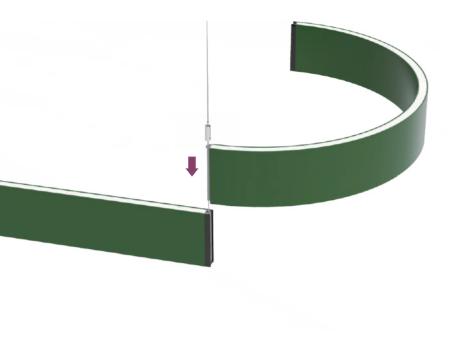


Luminous Splicing

The installation process is straightforward and convenient. The lamp body can be easily joined together through splicing. Once spliced, the chandelier can be installed, and the light can be activated without the need to consider the internal wiring of the lamp body


Product Features

Arc Sizes: Ø600mm, Ø800mm, Ø1200mm

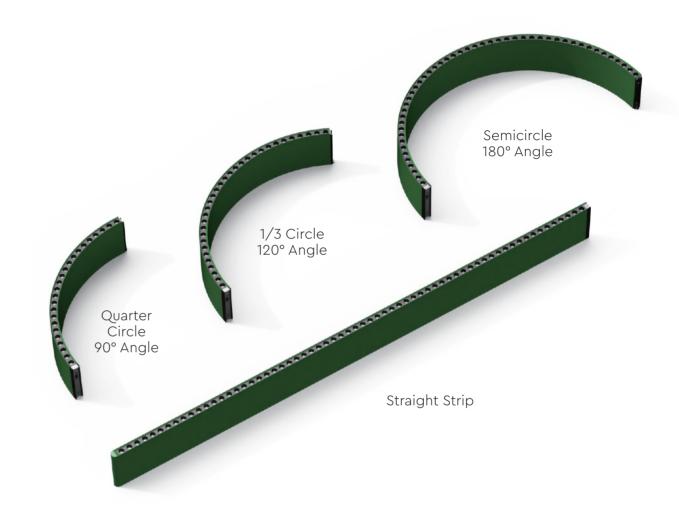

Upward and Downward Illumination

The upper and lower lights collaborate to establish a three-dimensional lighting environment. The lower lights effectively illuminate the entire office area, while the upper lights add brightness to the ceiling, resulting in heightened luminosity. This, in turn, enhances the comfort and relaxation experienced by individuals within the space. Such a lighting solution is well-suited for employment in refined office areas

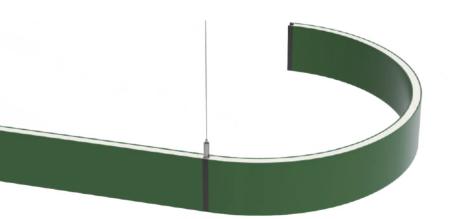

Innovative Splicing

The lamp can be creatively assembled into various shapes through splicing, allowing for imaginative combinations. This adaptability makes it suitable for placement in a range of workstation configurations, accommodating diverse spatial scenarios and enriching the office environment.

Standard Parameter


Color: Various Selection (Can be very upon request)

Lumen Output: Uplight 80lm/W + Downlight 100lm/W

Color Temperture (CCT): 3000K/ 4000K/ 5000K


CRI: Ra 90+


Dimming Option: 1-10V/ DALI/ Non-dim

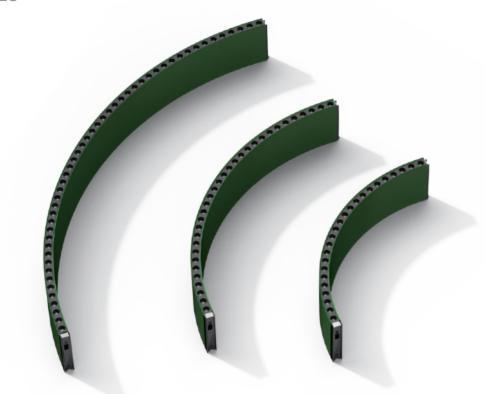


ARC Module - Quarter Circle 90° Angle


Standard Parameter

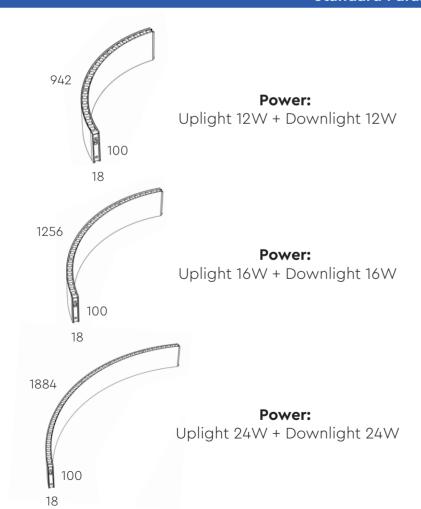

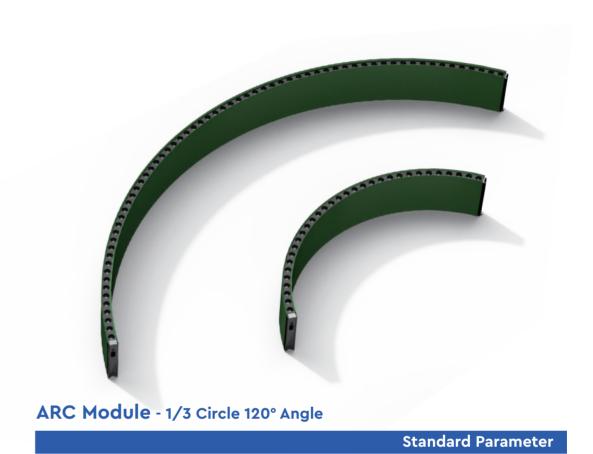

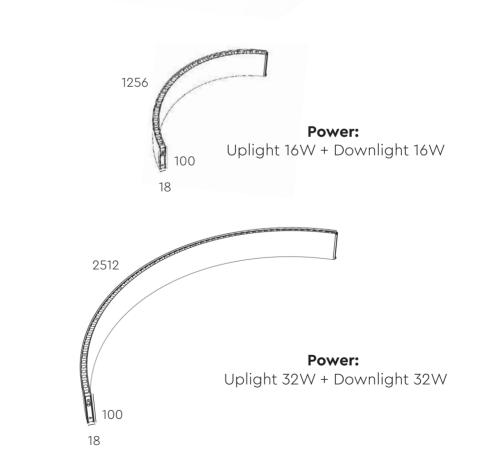



KORRIS SERIES

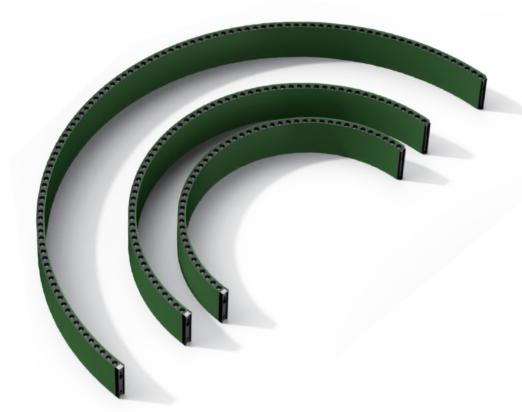

ARC Module - Semicircle 180° Angle

Standard Parameter

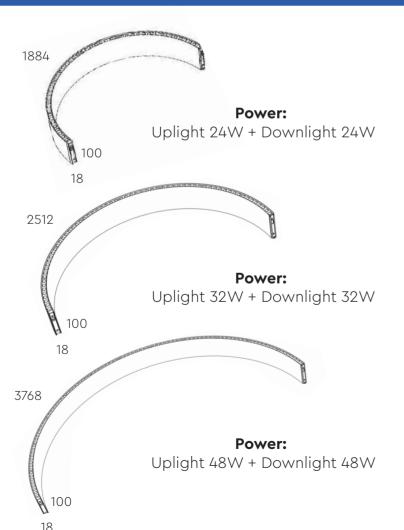

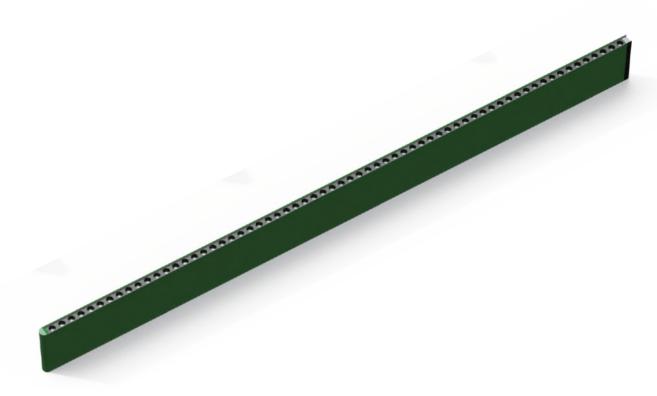


ARC Module - Straight Strip

Standard Parameter


1209	Power: Uplight 32W + Downlight 32W
1061	Power: Uplight 28W + Downlight 28W
913	Power: Uplight 24W + Downlight 24W
765	Power: Uplight 20W + Downlight 20W
617	Power: Uplight 16W + Downlight 16W






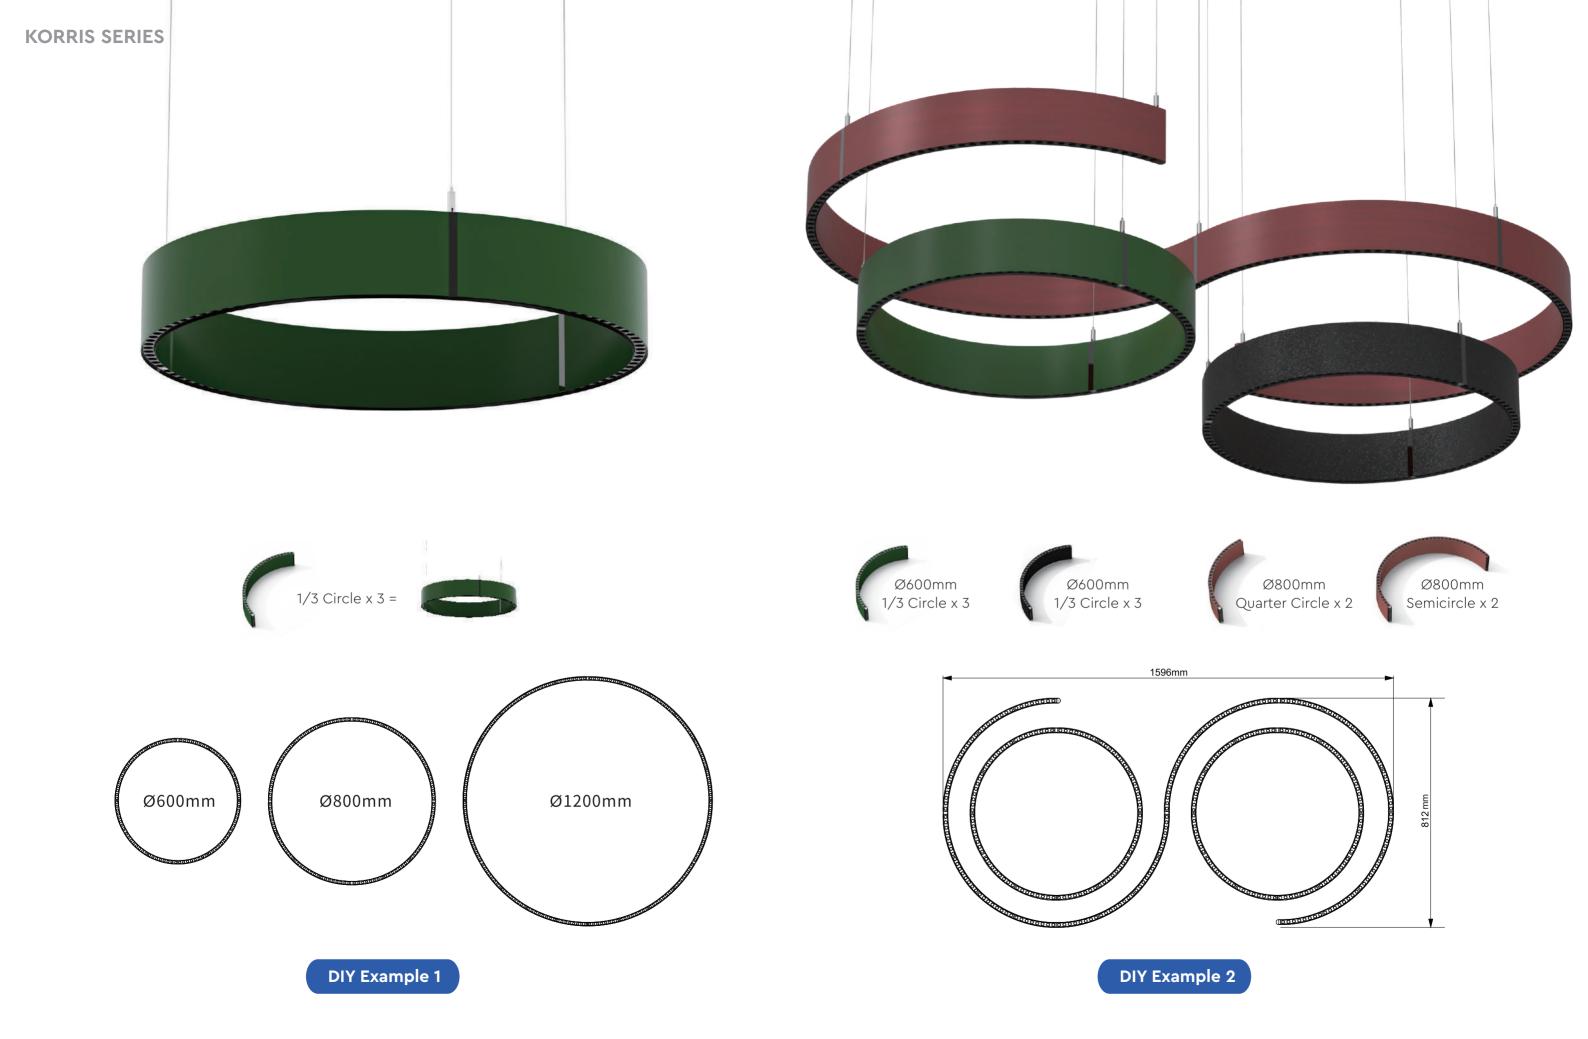



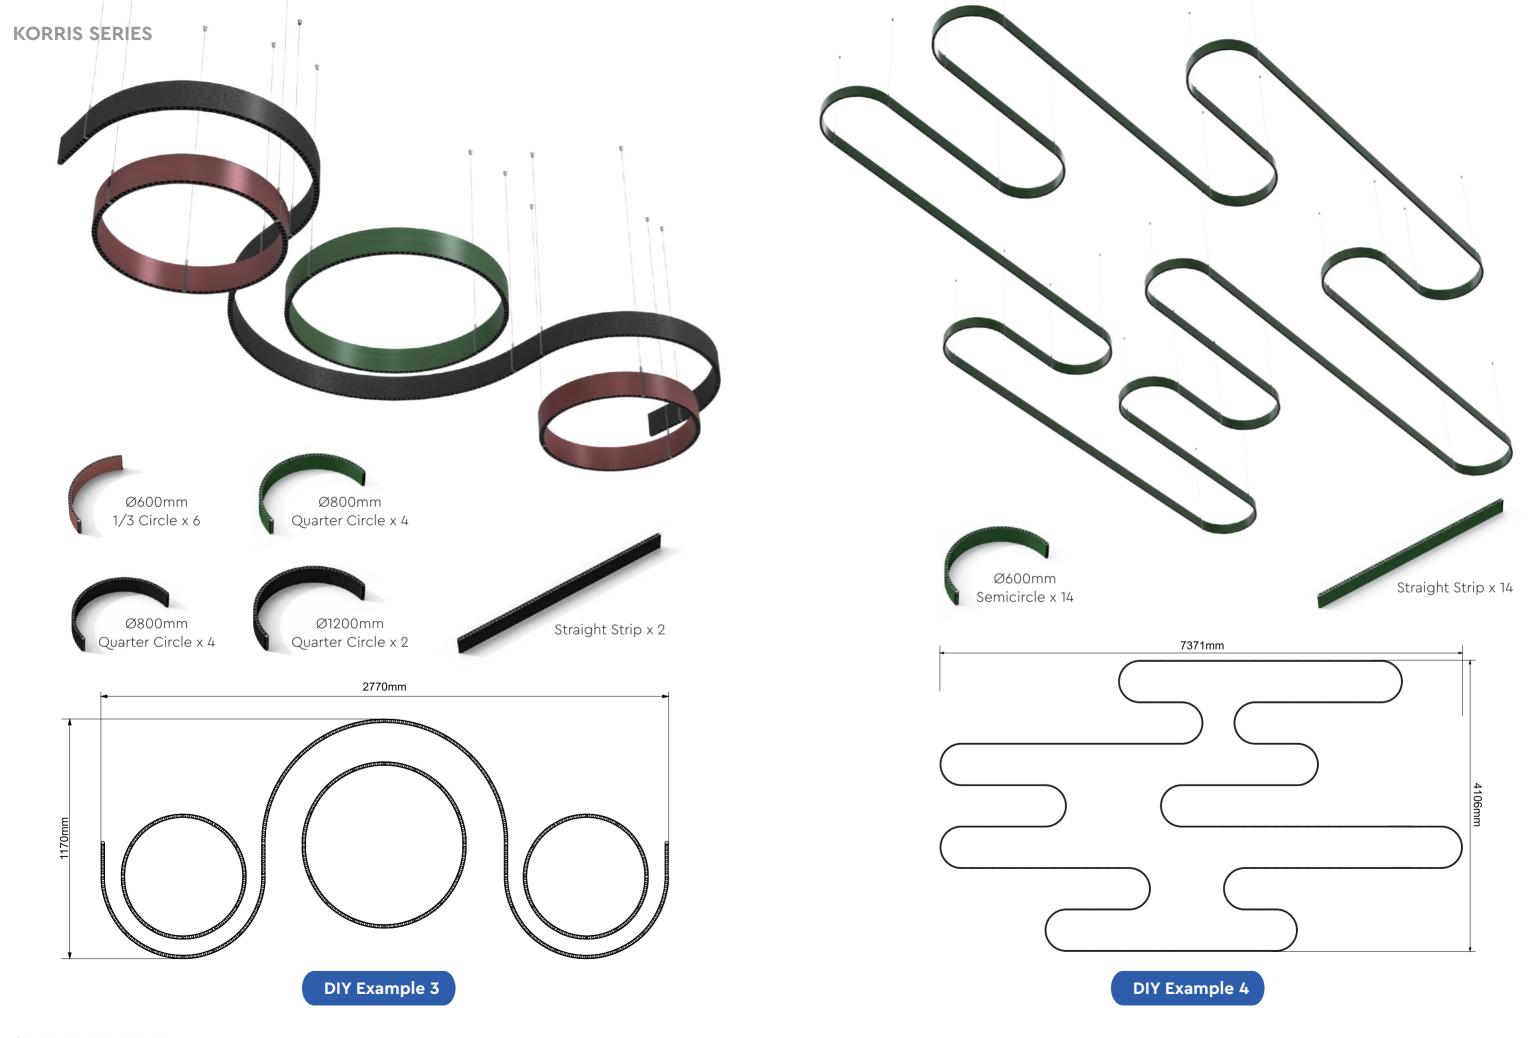


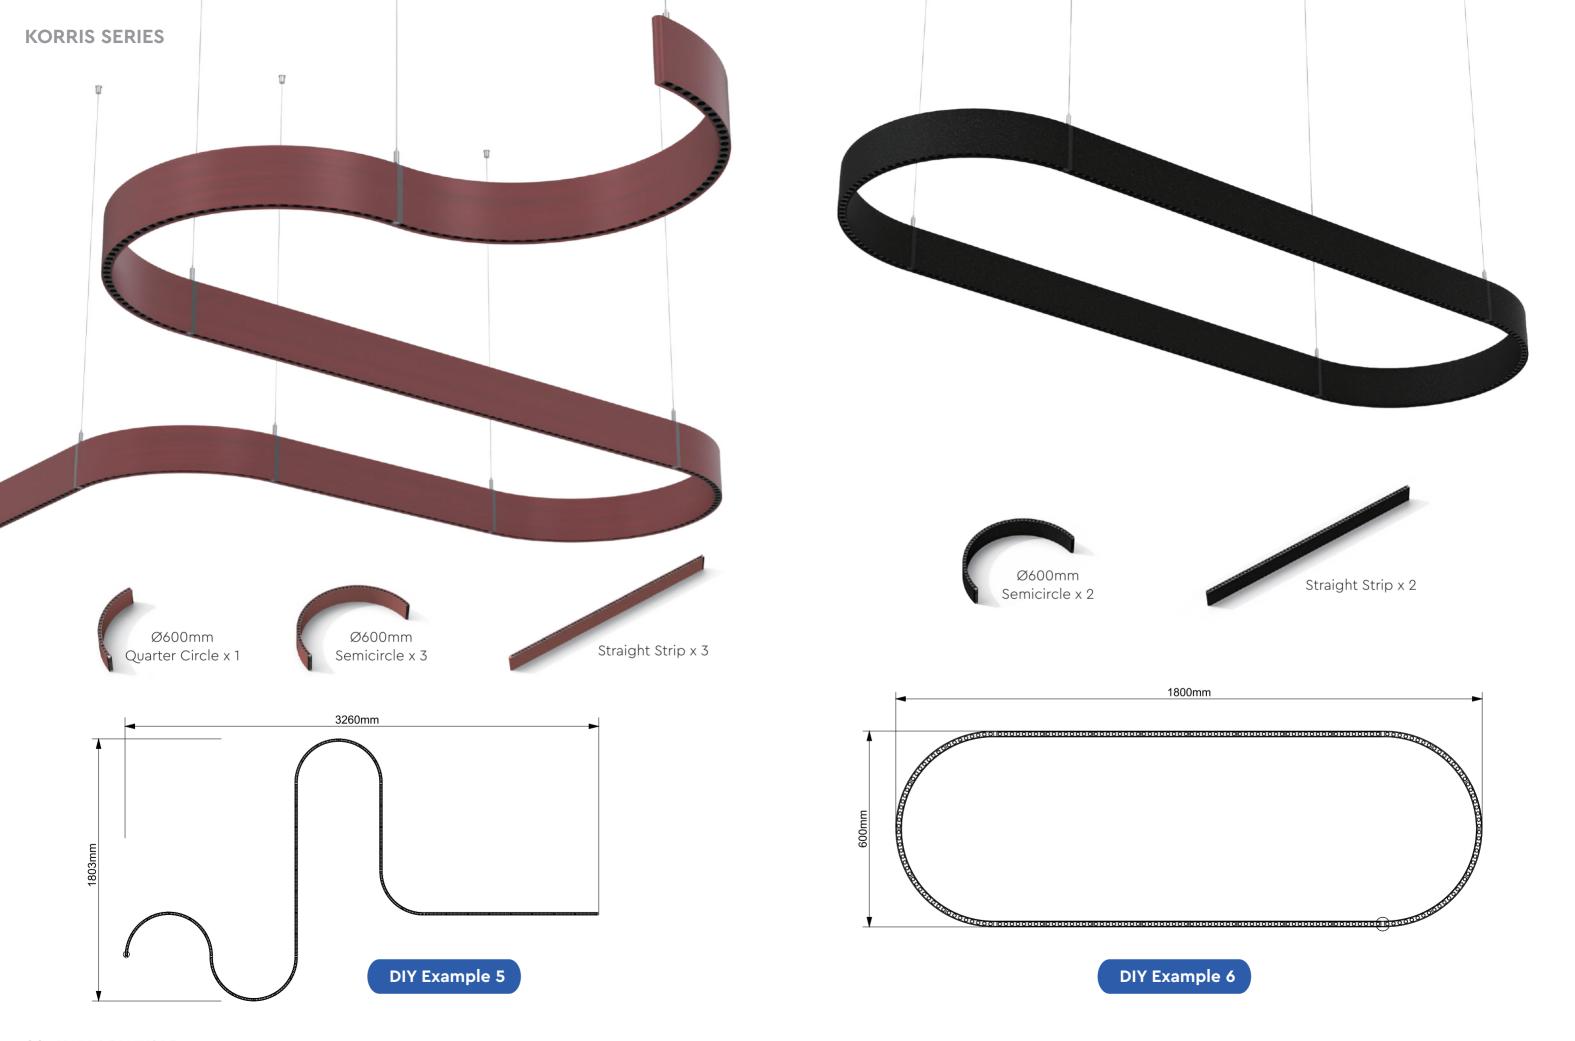









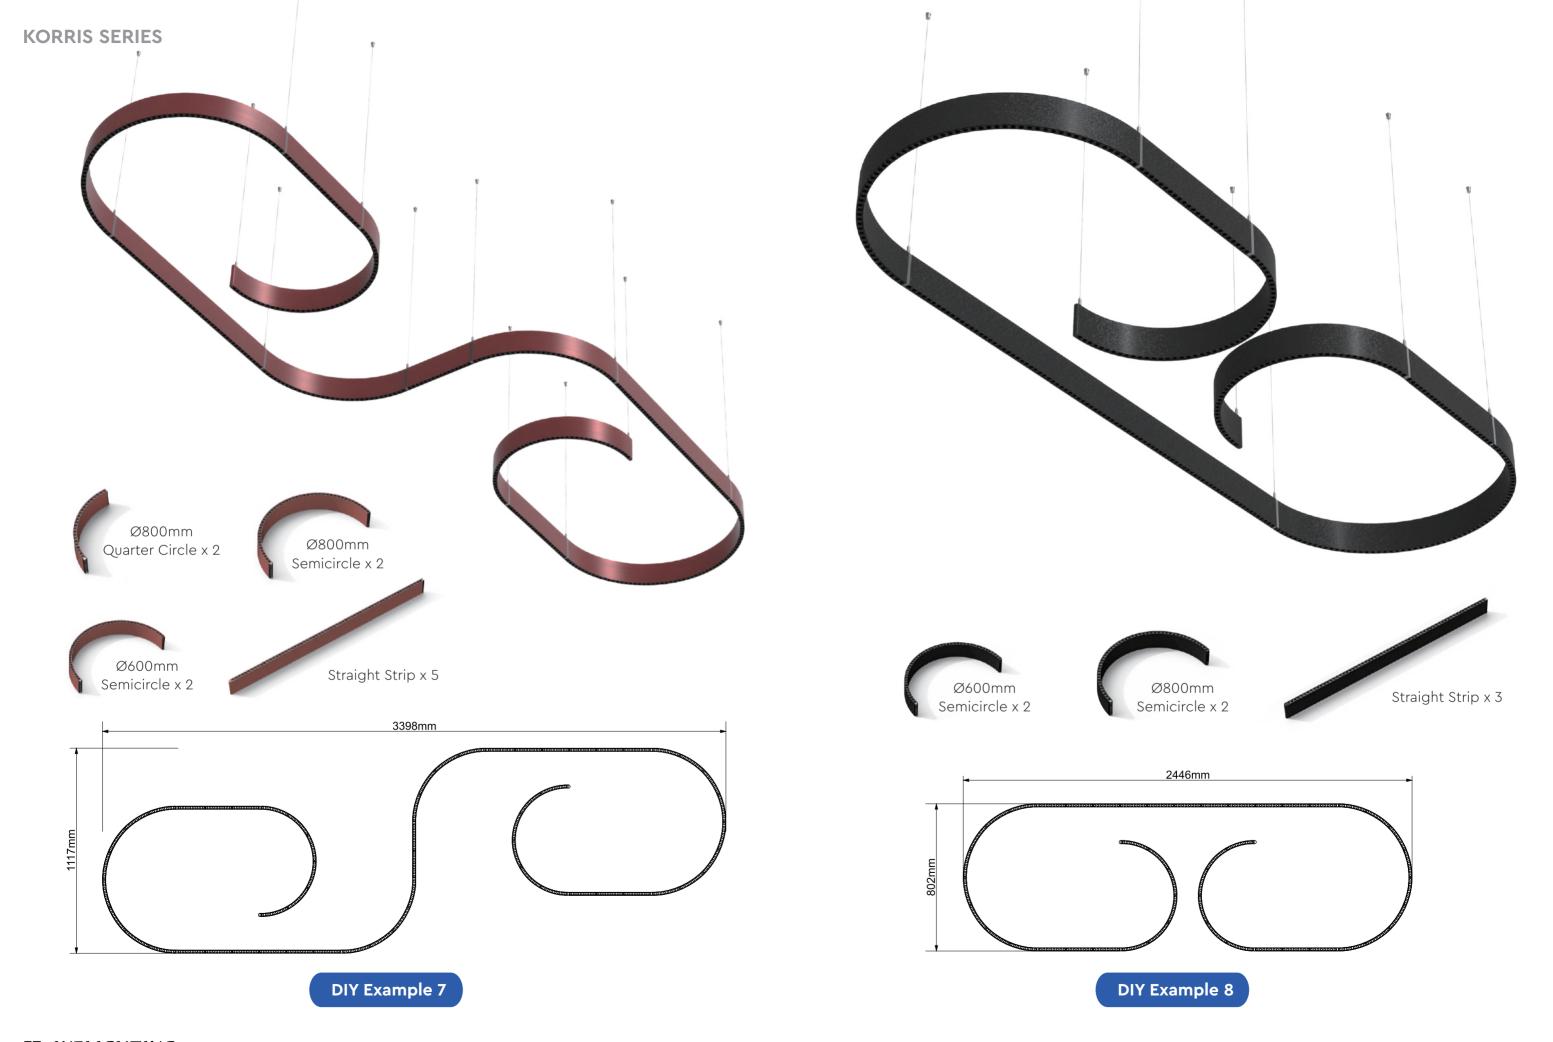

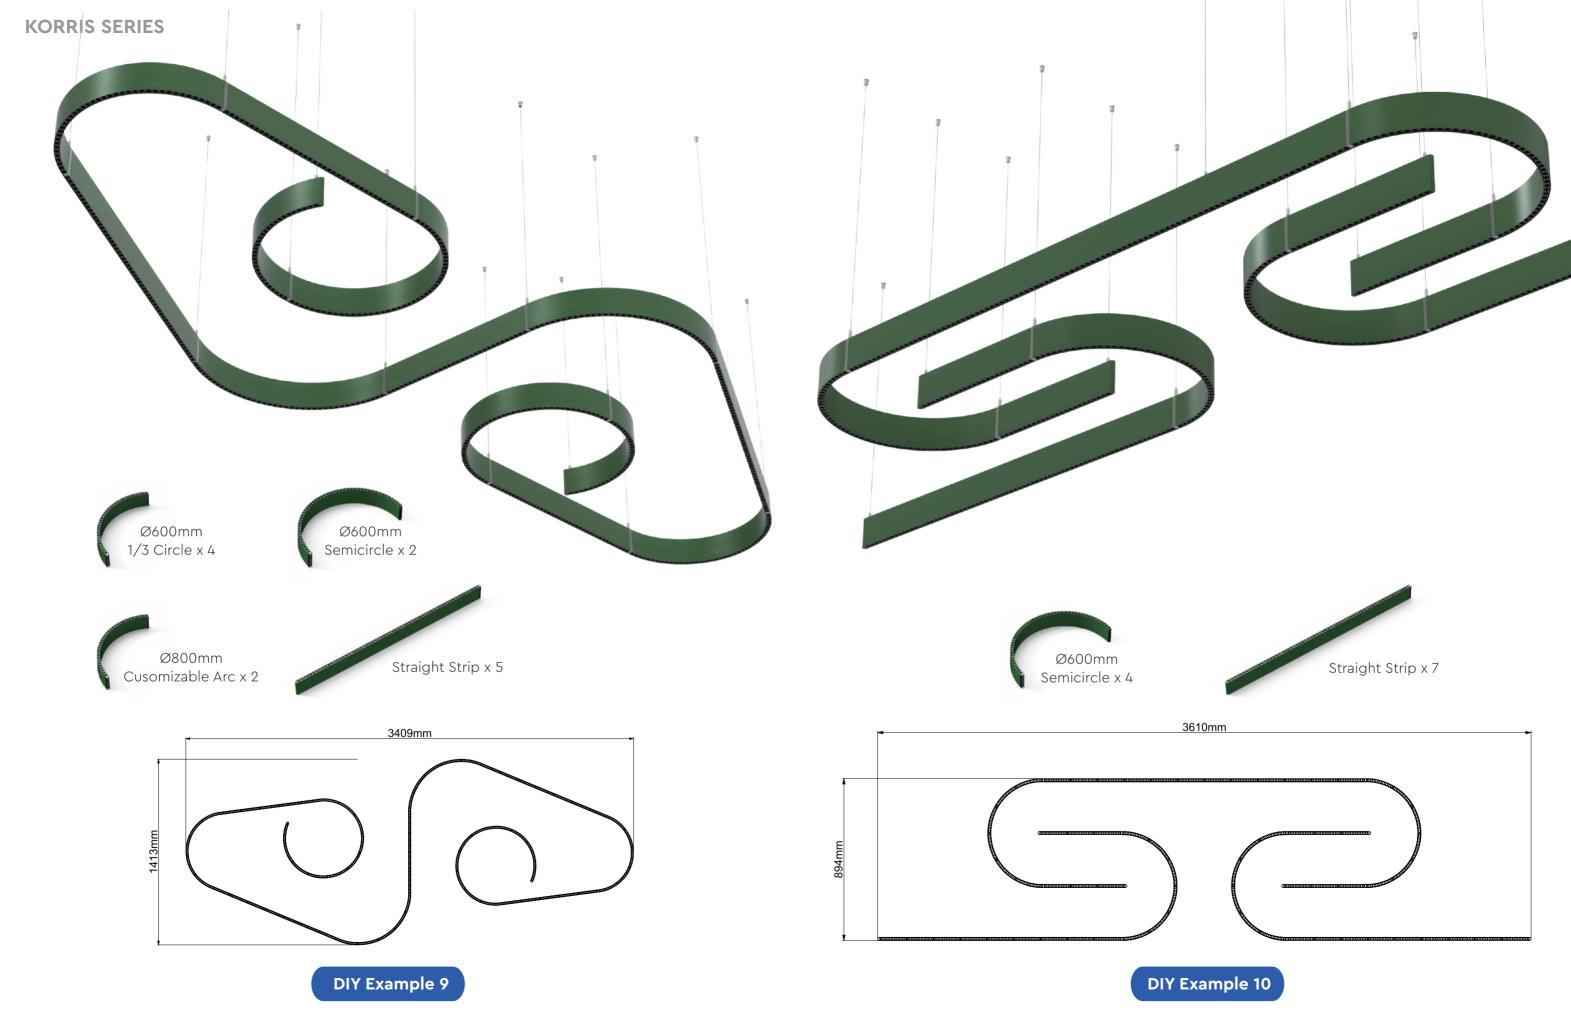

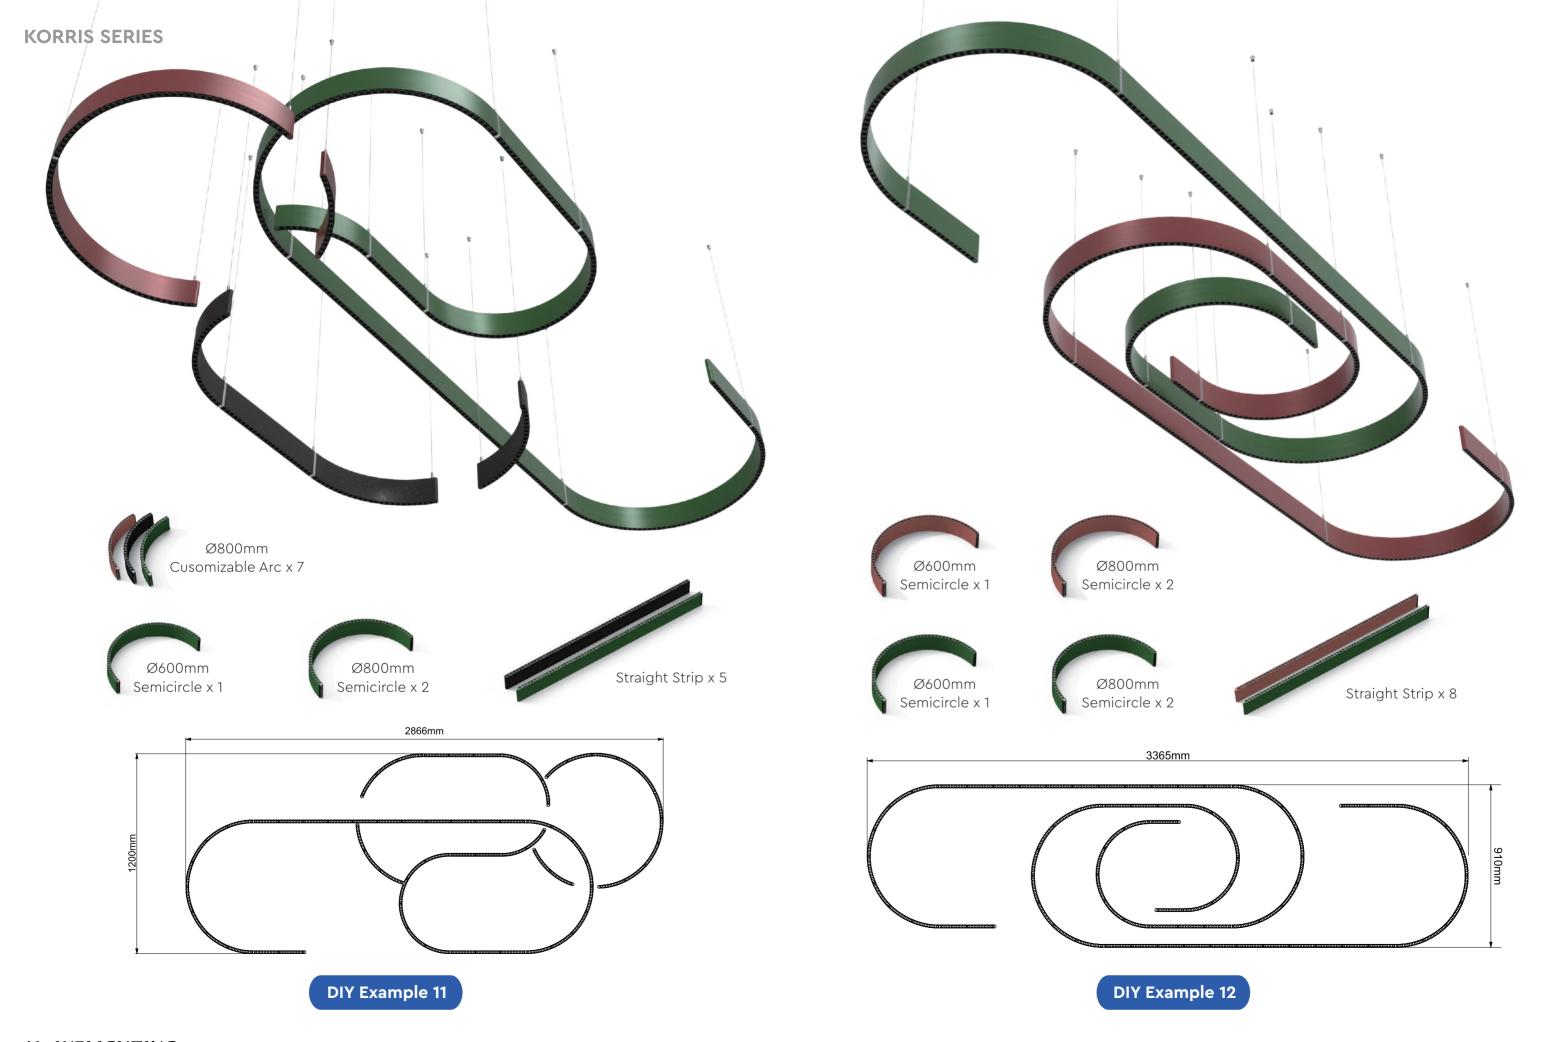



www.welighting.com



WELIGHTING



+852 2359 9866



mail@welighting.com



Unit 01-07, 22/F, CEO Tower, 77Wing Hong Street, Lai Chi Kok, Hong Kong

WELIGHTING

www.welighting.com

© 2023 We Lighting Ltd. All rights reserved.