

KYLO SERIES

ARTIFICIAL SKYLIGHT


get your own slice of bright blue sky
make everyday a sunny day

WELIGHTING



KYLO CAN CALM YOUR MIND

Rayleigh Scattering Technology
Presents a deep sense of blue sky.

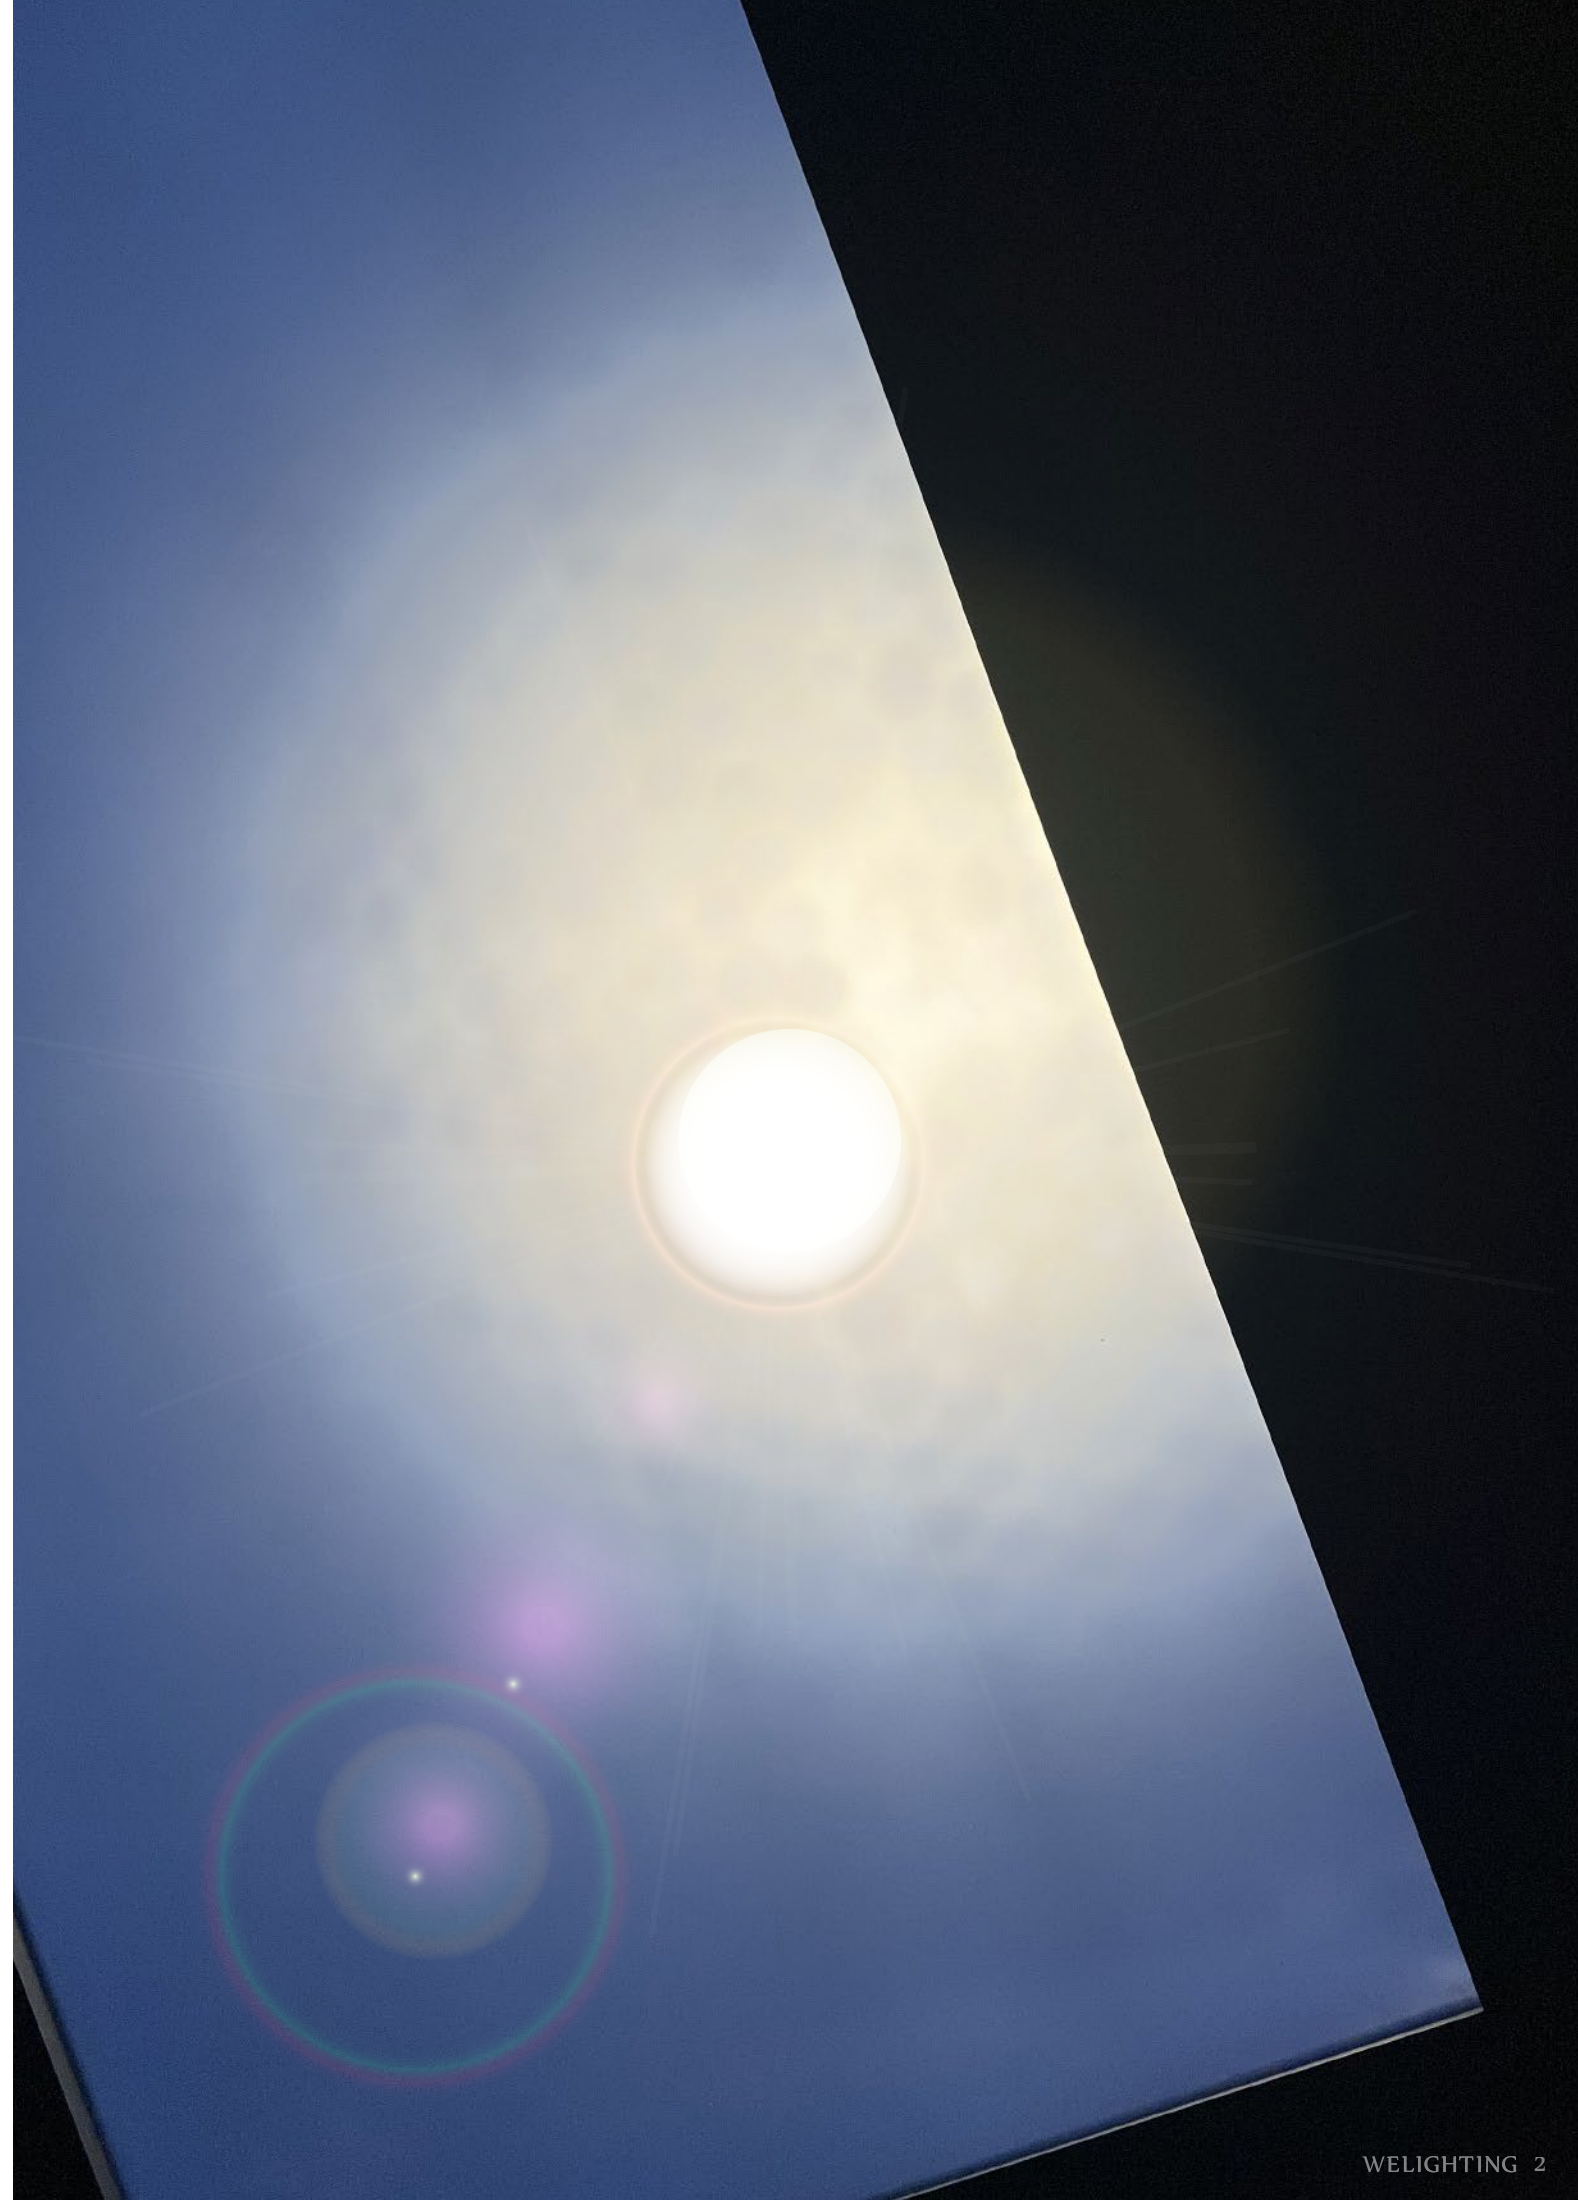


KYLO

True sensations of sunlight
by
Unique technology

Rayleigh Scattering

the scattering of light by particles in a medium, without change in wavelength. It accounts, for example, for the blue color of the sky, since blue light is scattered slightly more efficiently than red.

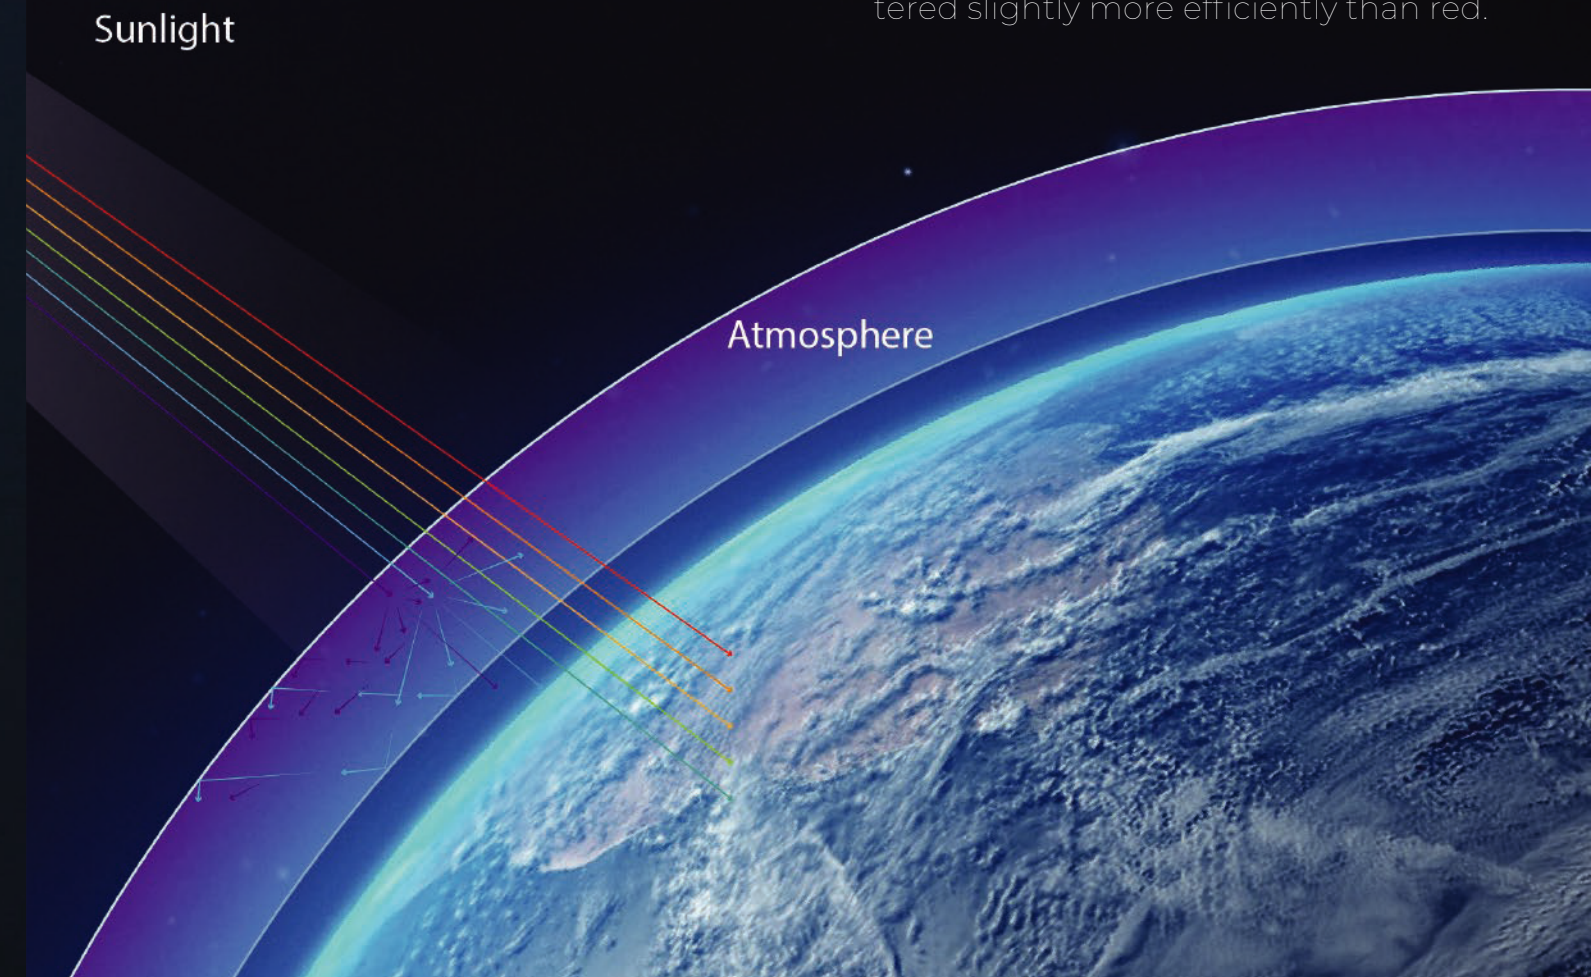

FEATURING



RAYLEIGH SCATTERING DIFFUSER ■

BALANCED THICKNESS ■

IMMENSITY OPTICAL FILM ■



RAYLEIGH SCATTERING DIFFUSER

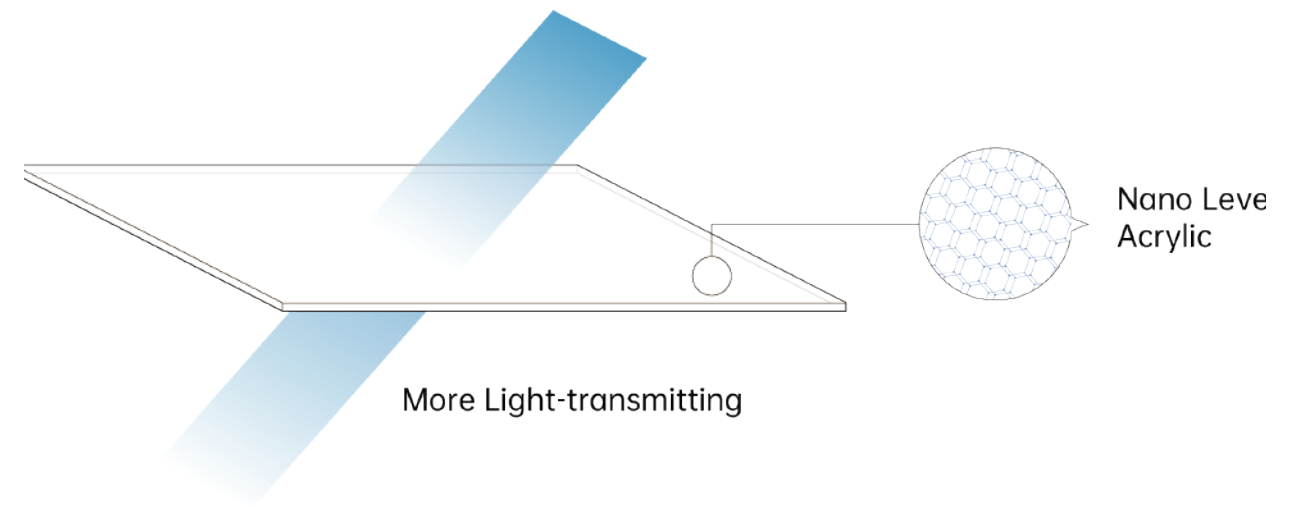
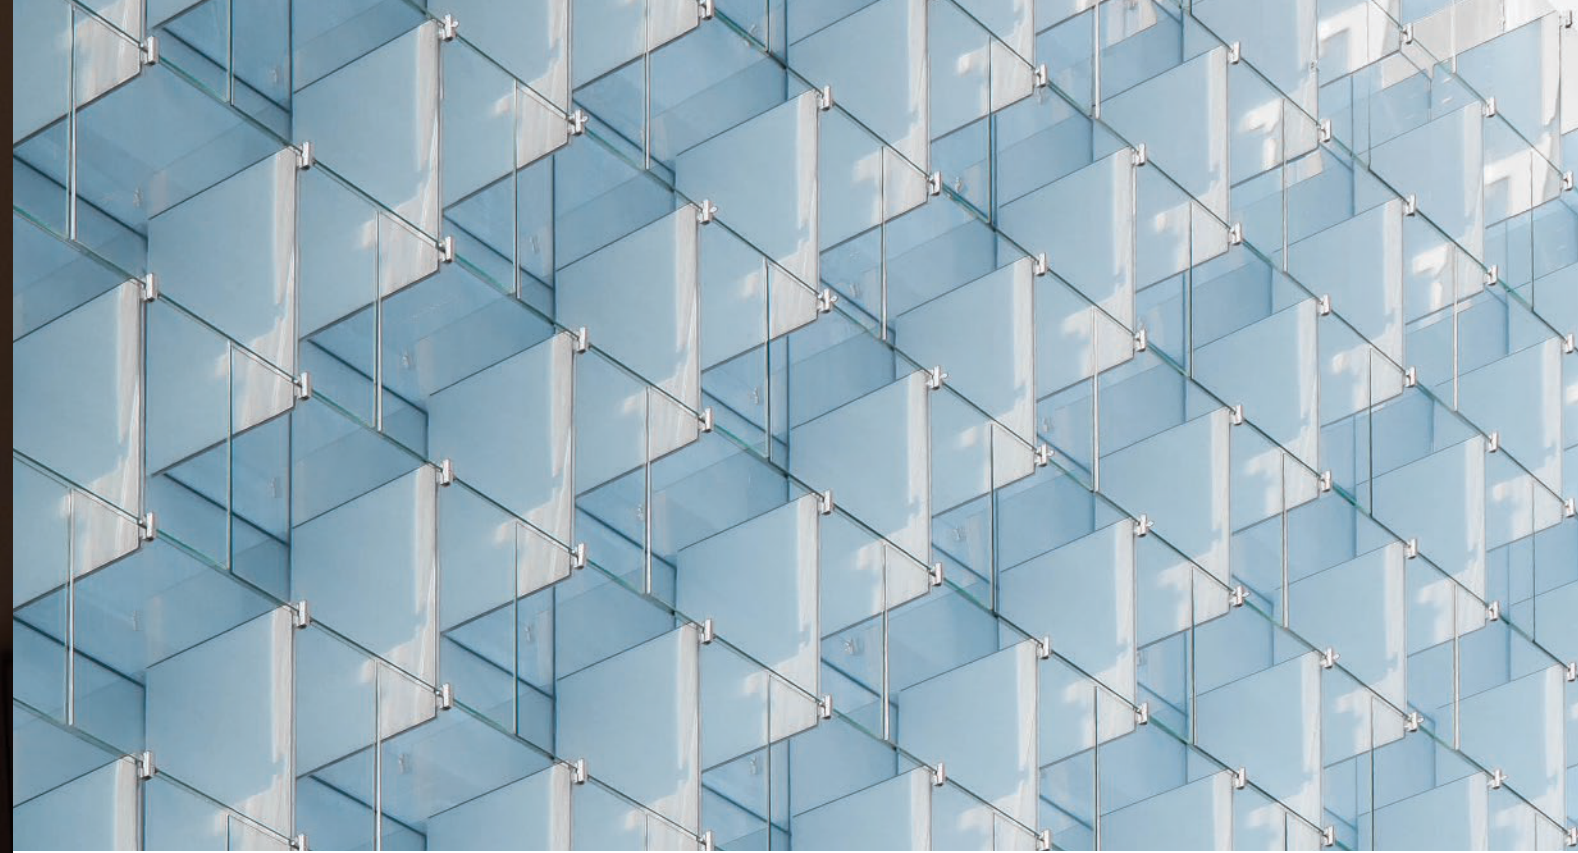


BE REALISTIC.

Acrylic-based Rayleigh Scattering Diffuser has better light transmittance and anti-oxidation ability than the same products in the market.



**BALANCED
THICKNESS**

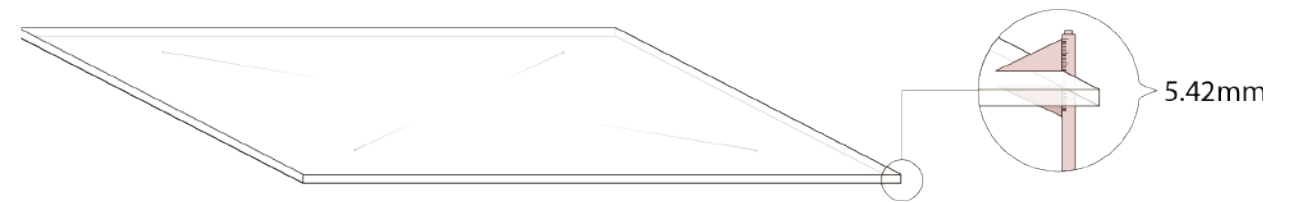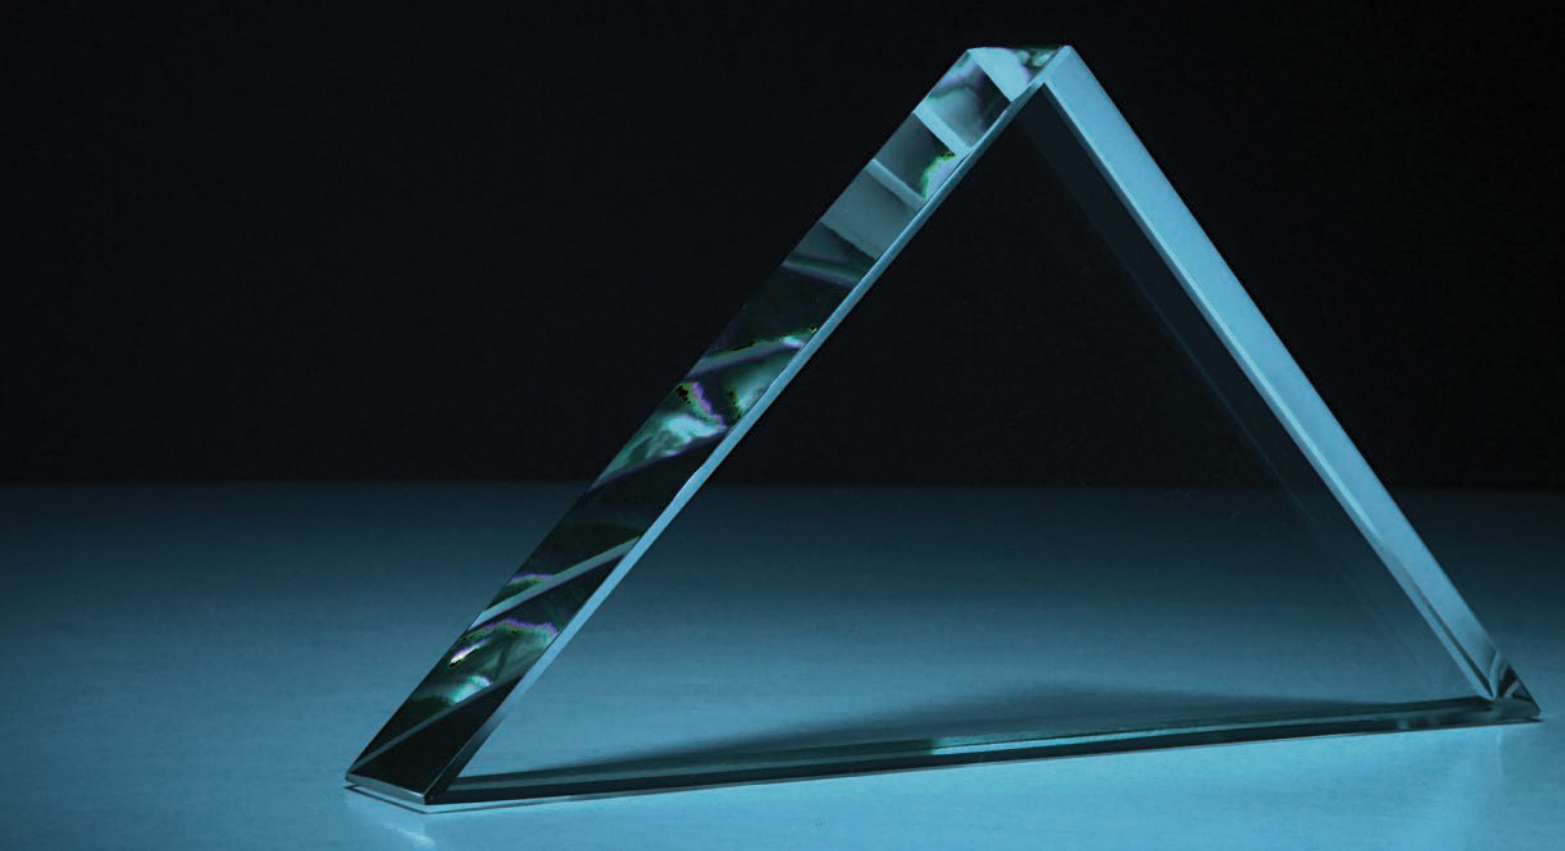


BE TOUGH.

The stable thickness provides the product with better mechanical strength, light mixing, and scattering effects in the same market, enabling the product to present a more realistic sky depth.



IMMENSITY OPTICAL FILM


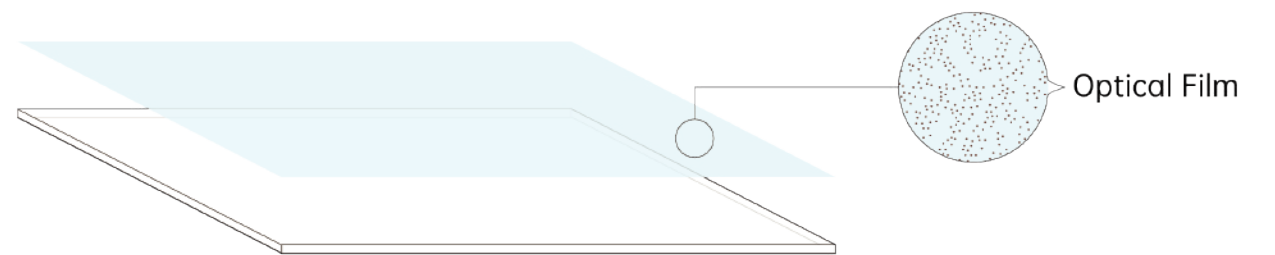


BE TRUE.

The Immensity OpticalFilm is a revolutionary new technology that will allow you to see deep space and distant views in an entirely different way.


RAYLEIGH SCATTERING TECHNOLOGY

TYPICAL PRODUCT

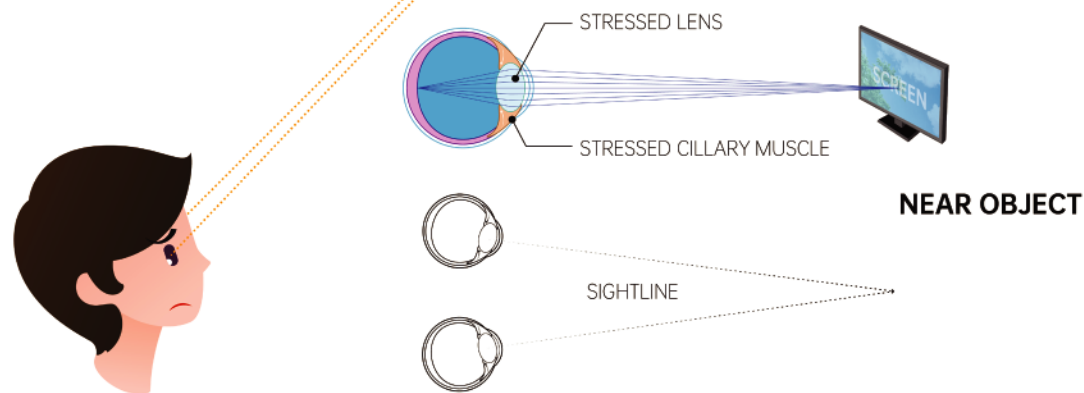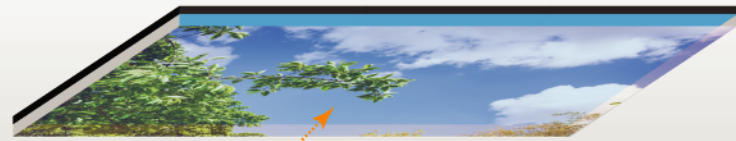

 FOCUS ON NEAR OBJECT

KYLO SERIES

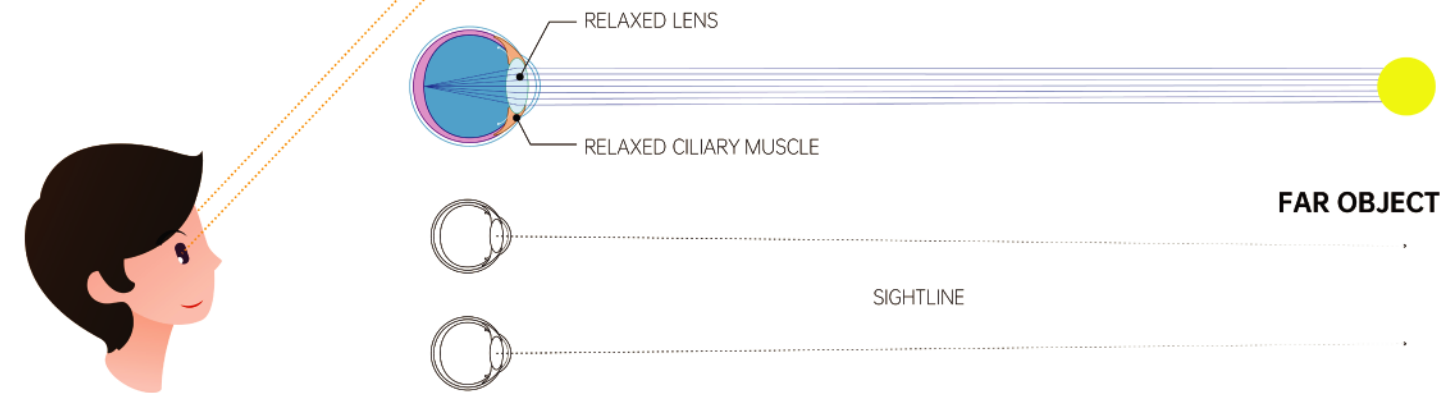

 FOCUS ON FAR OBJECT


With 3 Unique Technologies, KYLO can provide you with a more realistic blue sky effect, and at the same time give you a sense of distance from the deep sky, allowing you to feel the comfort of the sky while soothing your eyes.

**WE OFFER YOU
A FURTHER DISTANCE
SKY VISUAL EXPERIENCE**

HUMAN CENTRIC LIGHTING

Humans are affected by light not only on a visual level but also on a biological one. When installing a Human Centric Lighting solution (HCL), you reinforce your circadian rhythm, enhancing your cognitive skills and sense of well-being. It is also used to provide the ideal visual working conditions in challenging environments.


HCL can make you.....

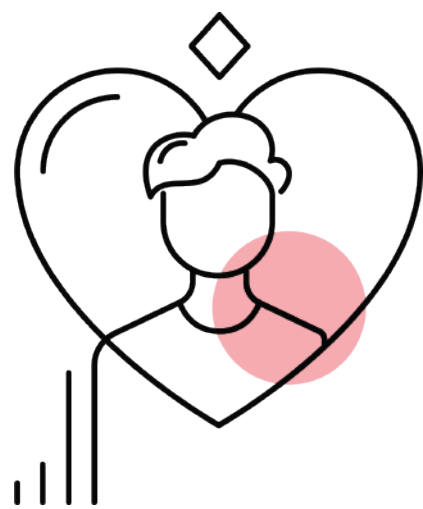



Feel Better



Perform Better

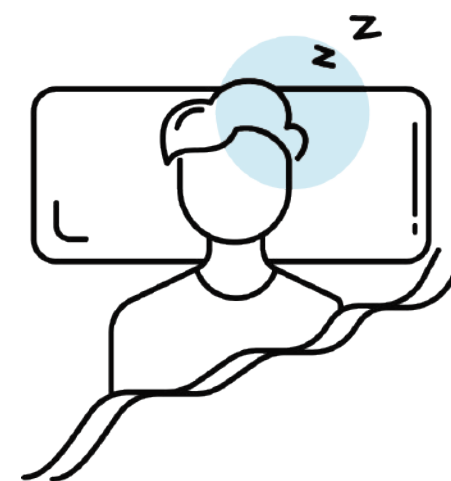


Sleep Better

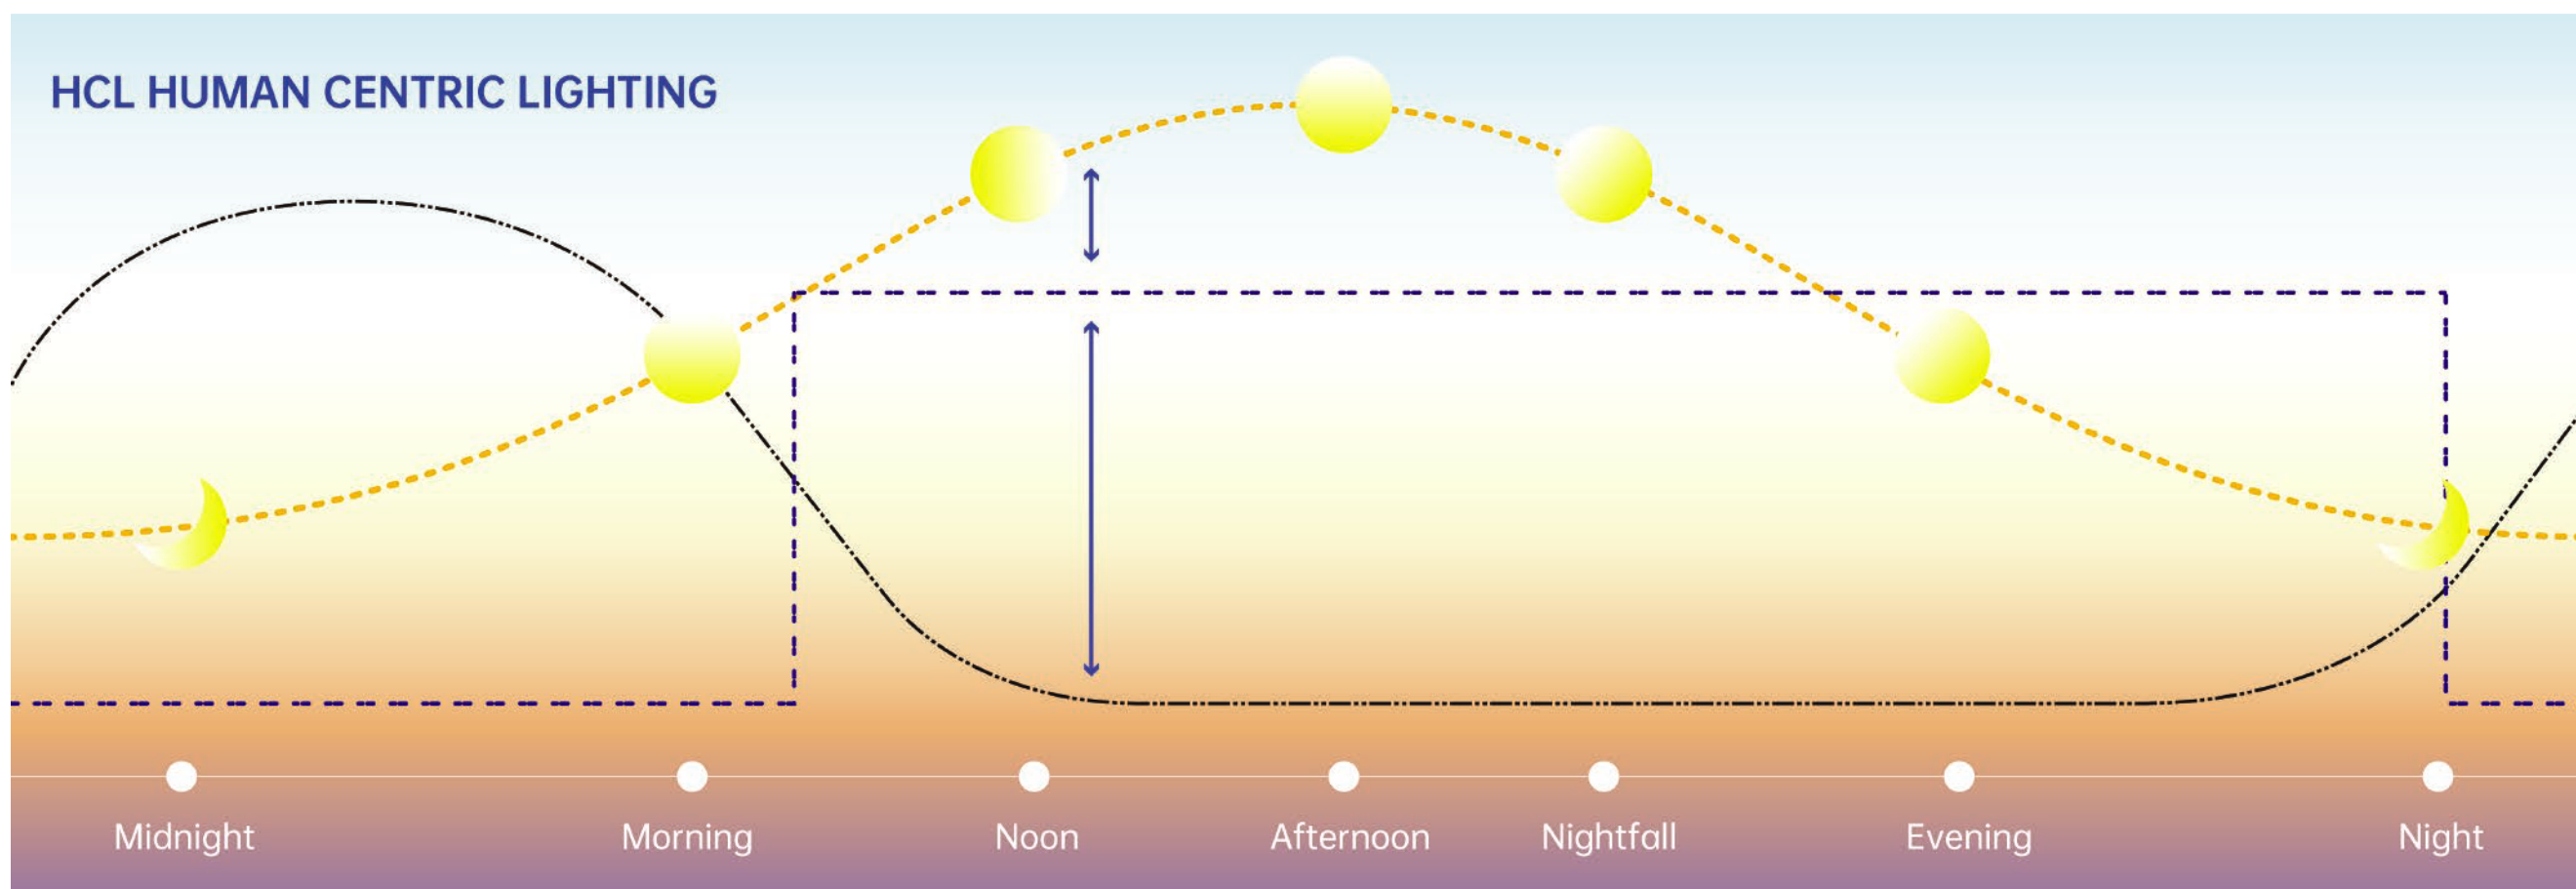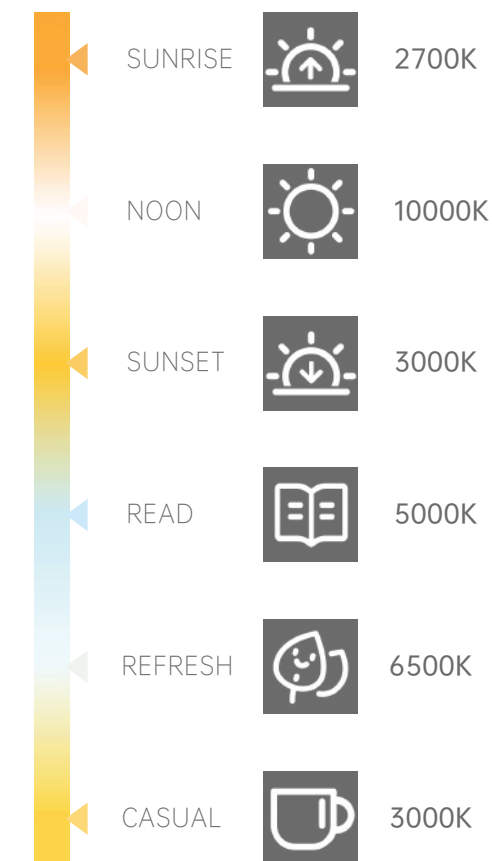

KYLO S

TECHNICAL INFORMATION

Unit: Millimeter (mm)

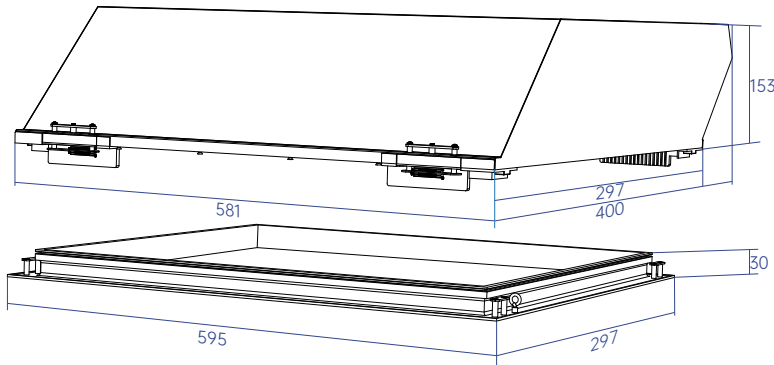

PRODUCT DIMENSIONS	595X400X176MM
N. WEIGHT	4.5KG
G. WEIGHT	6.1KG
NECESSARY SPACE FOR INSTALLATION	800X600X185MM
PACKAGE DIMENSIONS	620X440X210MM

**Dimensions may slightly different depend on the versions.

Installation Note:


Please mounting the Light close to the wall.

Make sure the Light's **Illuminant Direction** is **against** the wall.

KYLO L

TECHNICAL INFORMATION

Unit: Millimeter (mm)

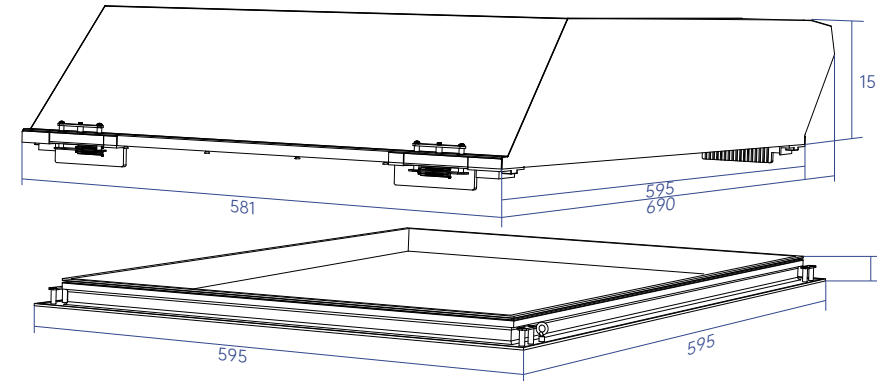

PRODUCT DIMENSIONS	595X690X176MM
N. WEIGHT	8.4KG
G. WEIGHT	11.4KG
NECESSARY SPACE FOR INSTALLATION	800X800X185MM
PACKAGE DIMENSIONS	728X628X212MM


**Dimensions may slightly different depend on the versions.

Installation Note :


Please mounting the Light close to the wall.

Make sure the Light's **Illuminant Direction** is **against** the wall.

Front Veiw

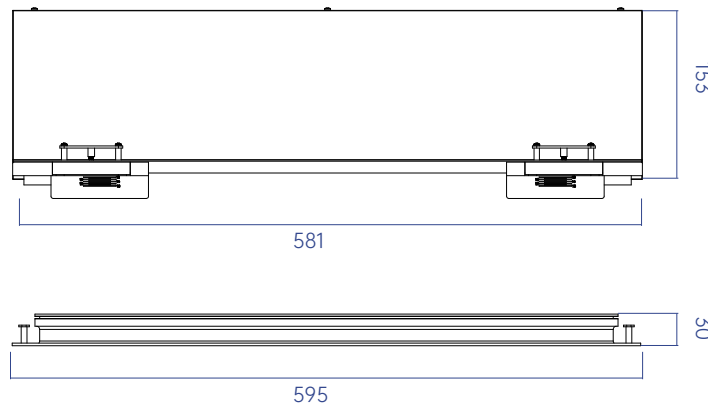

Side Veiw

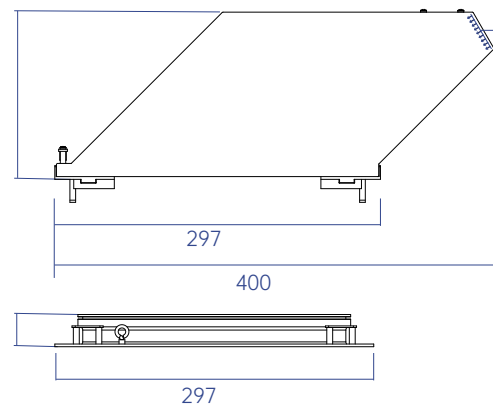


Others


Illuminant Direction
Make sure the Light's Illuminant Direction is against the wall.



Front Veiw

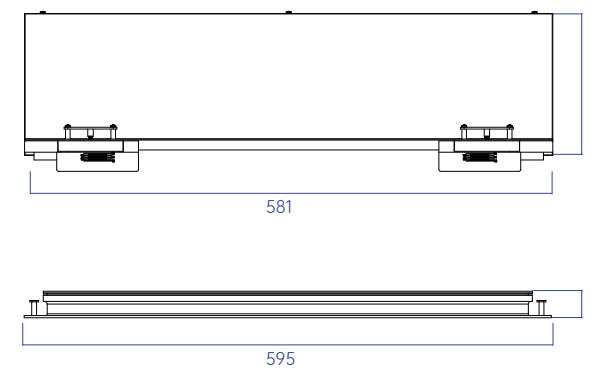

Side Veiw

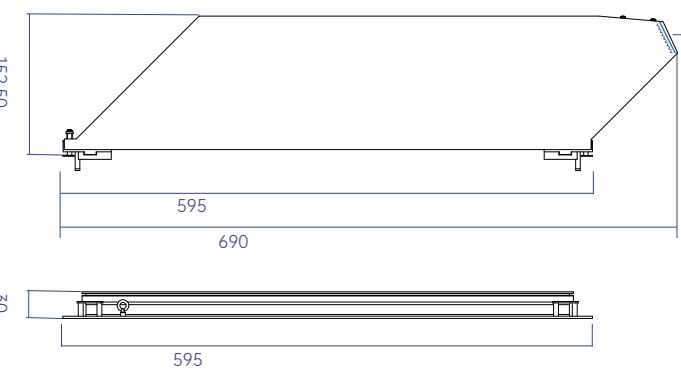

Others

Illuminant Direction
Make sure the Light's Illuminant Direction is against the wall.



TECHNICAL INFORMATION

ORDER CODE	WE LP71061 Non-dimmable	WE LP71062 Adjustable Brightness and Color Temperature	WE LP71063 Adjustable Brightness and Color Temperature
VERSIONS AVAILABLE	Classic	DALI	Smart
INPUT VOLTAGE	100 - 240V~ 50/60Hz	100 - 240V~ 50/60Hz	100 - 240V~ 50/60Hz
POWER INPUT	60 W (Max)	60 W (Max)	60 W (Max)
POWER CONSUMPTION	1 channel (36V DC 1500mA)	2 channels (36V DC 1500mA)	2 channels (36V DC 1500mA)
TOTAL LIGHT OUTPUT	1700 lm	800 lm - 1700 lm	800 lm - 1700 lm
CCT RANGE	10000 K	1800 K - 10000 K	1800 K - 10000 K
CERTIFICATION	CE, RoHS ENEC, TUV, CB, UL, PSE (In Progress)	CE, RoHS ENEC, TUV, CB, UL, PSE (In Progress)	CE, RoHS ENEC, TUV, CB, UL, PSE (In Progress)
FRAME CORNICE	The frame can be Ceiling mounted,Plasterboard mounted.		

TECHNICAL INFORMATION

ORDER CODE	WE LP71064 Non-dimmable	WE LP71065 Adjustable Brightness and Color Temperature	WE LP71066 Adjustable Brightness and Color Temperature
VERSIONS AVAILABLE	Classic	DALI	Smart
INPUT VOLTAGE	100 - 240V~ 50/60Hz	100 - 240V~ 50/60Hz	100 - 240V~ 50/60Hz
POWER INPUT	80 W (Max)	80 W (Max)	80 W (Max)
POWER CONSUMPTION	1 channel (36V DC 2000mA)	2 channels (36V DC 2000mA)	2 channels (36V DC 2000mA)
TOTAL LIGHT OUTPUT	2200 lm	1000 lm - 2200 lm	1000 lm - 2200 lm
CCT RANGE	10000 K	1800 K - 10000 K	1800 K - 10000 K
CERTIFICATION	CE, RoHS ENEC, TUV, CB, UL, PSE (In Progress)	CE, RoHS ENEC, TUV, CB, UL, PSE (In Progress)	CE, RoHS ENEC, TUV, CB, UL, PSE (In Progress)
FRAME CORNICE	The frame can be Ceiling mounted,Plasterboard mounted.		

KYLO SERIES

ARTIFICIAL SKYSLIGHT

by WELIGHTING



www.welighting.com



WELIGHTING



+852 2359 9866



mail@welighting.com



Unit 01-07, 22/F, CEO Tower,
77Wing Hong Street, Lai Chi Kok, Hong Kong